


# CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM W

Code article 2064625


Concord

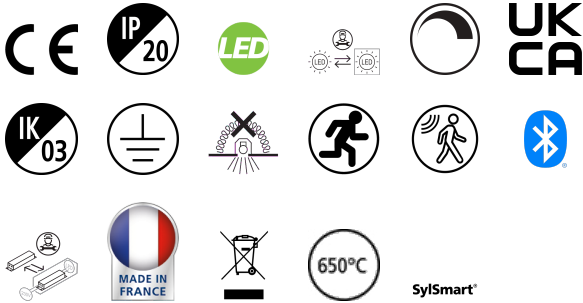

CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM W is a linear luminaire for suspended, surface or ceiling recessed mounting with 3 meter pre-wiring and complete with end caps and suspension cables, direct light distribution, compact and minimalist design, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, white (RAL9016) finishing, extruded aluminium body, 1294x56x93mm dimensions, prismatic diffuser combined with lenses, 4000K (neutral white) colour temperature, total system power: 25W, total fixture output: 3150lm, luminaire efficacy: 126lm/W, colour rendering: Ra >90, LED Chromacity: 3 step MacAdam ellipse, lifespan: 89,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, Sylsmart® Connected enabled, 3-hours LiFePO4 integrated DALI Self Test emergency, Class I electrical protection, IP20, IK03, suitable for internal environment only.

## Atouts techniques

### Dimensions (mm)

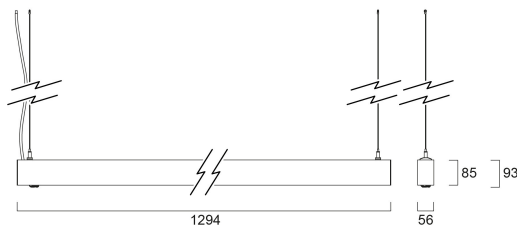

### Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Beam diameter [in]	Illuminance [lx]	
0.5	0.71	0.73	2.33'	24.1"	9790	
			E107	E100	35.3"	2590
			E100	E100	35.1"	2582
1.0	1.42	1.46	4.66'	48.2"	2447	
			E107	E100	35.3"	872
			E100	E100	35.1"	868
1.5	2.13	2.19	6.99'	72.3"	1638	
			E107	E100	35.3"	588
			E100	E100	35.1"	586
2.0	2.83	2.92	9.30'	96.4"	812	
			E107	E100	35.3"	488
			E100	E100	35.1"	482
2.5	3.54	3.65	11.78'	121.5"	392	
			E107	E100	35.3"	317
			E100	E100	35.1"	314
3.0	4.25	4.38	14.00'	144.6"	272	
			E107	E100	35.3"	218
			E100	E100	35.1"	212

Distance [m] Cone diameter [m]  
 — C0 - C180 (Half beam angle: 72.0°)  
 — C90 - C270 (Half beam angle: 70.0°)



# CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM W

Code article 2064625

Concord

## Données générales

Nom du produit	CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM W
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Suspended, Ceiling surface mounting, Ceiling recessed mounting
Built in presence detector	PIR
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3150
Luminaire efficacy (lm/W)	126
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	270

## Caractéristiques électriques

Emergency mode	Maintained
Emergency type	
Emergency duration (h)	3
Consommation électrique totale (W)	25
Actuel (A)	0.123
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	500
Courant d'appel (A)	13.6
Inrush Duration (µs)	304
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	30
Max. products per 13A C Breaker	38
Max. products per 16A C Breaker	46
Max. products per 20A C Breaker	58
Max. products per 10A B Breaker	18
Max. products per 13A B Breaker	23
Max. products per 16A B Breaker	28
Max. products per 20A B Breaker	35
Connectable conductor cross section - Min (mm²)	0.75

# CONTINUUM PLUS 1.2 940 ST UGR D SSA03 EM W

Code article 2064625

## Concord

Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5	<b>Emballage</b>	
<b>Durée de vie</b>		Product EAN number	5025768646258
Lifespan L70 B50	100000	Longueur simple de l'emballage (cm)	139.0
Lifespan L80 B50	89000	Largeur simple de l'emballage (cm)	11.7
<b>Données physiques</b>		Packaging single depth (cm)	14.7
Housing colour	RAL 9016 - Traffic white / Bezel	DUN14 (inner)	05025768646258
IP rating	IP20	Units per outer package	1
IK rating	IK03	Packaging outer length / height (cm)	139.0
Diffuser finish	Transparent	Packaging outer width (cm)	11.7
Diffuser material	PC Polycarbonate	Packaging outer depth (cm)	14.7
Finition réflecteur	Not Applicable	<b>Sécurité</b>	
Longueur (mm)	1294	Glow Wire Test (°C)	650
Largeur (mm)	56	Condition de fonctionnement optimal (° C)	1-25
Nominal Product Height (mm)	93		
Poids (kg)	3.6		