





0.5	0.75 0.79		S(7) S(8) S(9)	27° 37° 58°	219 633 896
1.0	1.51 1.57		S(7) S(8) S(9)	37° 58° 90°	439 145 224
1.5	2.26 2.36		S(7) S(8) S(9)	37° 58° 90°	259 87 100
2.0	3.01 3.15		S(7) S(8) S(9)	37° 58° 90°	153 50 56
2.5	3.77 3.93		S(7) S(8) S(9)	37° 58° 90°	93 29 32
3.0	4.52 4.72		S(7) S(8) S(9)	37° 58° 90°	55 16 17
Distance [m]		Cone diameter [m]	Illuminance [lx]		
—		C5 - C180 (half beam angle: 76.4°)			
—		C90 - C170 (half beam angle: 74.7°)			

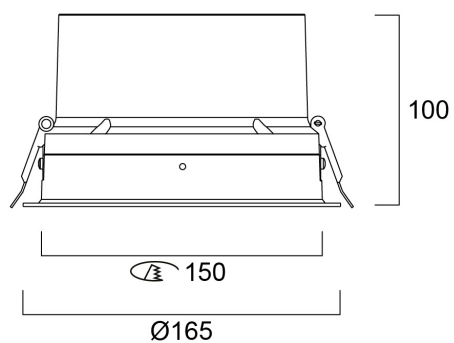



Concord
