


Colossal 1200mm 840 Prism Dir White SSC

Code article 2071296

Concord

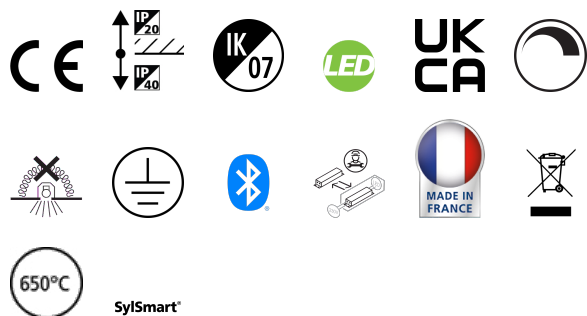

1200mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct light distribution, 16510lm luminous flux, 117.5W system power, 141lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 350mA drive current. UGR≤19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Atouts techniques

Dimensions (mm)



Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.04	50°	3380	8140
1.0	2.09	50°	1740	1000
1.5	3.13	50°	1440	570
2.0	4.17	50°	1180	350
2.5	5.21	50°	1000	250
3.0	6.26	50°	880	160



Colossal 1200mm 840 Prism Dir White SSC

Code article 2071296

Concord

Données générales

Nom du produit	Colossal 1200mm 840 Prism Dir White SSC
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling surface mounting
Built in presence detector	NONE
General application	Hospitality, Office
Operating temperature range (°C)	5°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	16510
Luminaire efficacy (lm/W)	141
Température de couleur (K)	4000
Colour Code	840
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	117.5
Actuel (A)	350
Primary Supply/Product voltage - min (V)	198.0
Primary Supply/Product voltage - max (V)	264.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Drive current (mA)	350
Courant d'appel (A)	23
Inrush Duration (µs)	174
Energy Efficiency Class (A->G) of contained light source	B, B(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	18
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	28
Max. products per 20A C Breaker	34
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	14
Max. products per 20A B Breaker	17
Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	2.5

Colossal 1200mm 840 Prism Dir White SSC

Code article 2071296

Concord

Durée de vie

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	1168
Poids (kg)	23.0

Emballage

Product EAN number	5025768712960
Longueur simple de l'emballage (cm)	14.0
Largeur simple de l'emballage (cm)	123.0
Packaging single depth (cm)	123.0
DUN14 (inner)	05025768712960
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	123.0
Packaging outer depth (cm)	123.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-25