


# BEACON XXL NB DALI 3K L3 BLK

Code article 2092994


Concord

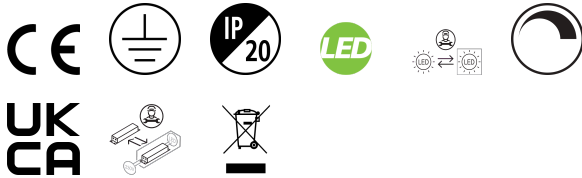

2092994 BEACON XXL NB DALI 3K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 21° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 3713lm, luminaire efficacy: 77lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, DALI dimmable, power factor: 0.95 electrical protection: CLASS I, DALI track adaptor, suitable for Concord Lytespan DALI track, ingress protection rating: IP20. **IMPORTANT NOTE:** This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

## Atouts techniques


### Dimensions (mm)

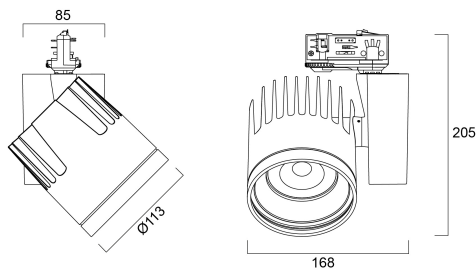

### Photométrie

Distance [m]	Cone diameter [m]	E171 E172	E171 E172	E171 E172
0.5	0.16	5529 3449	10.3°	5529 3449
1.0	0.36	1487 714	10.3°	1487 714
1.5	0.55	642 342	10.3°	642 342
2.0	0.73	362 173	10.3°	362 173
2.5	0.91	237 119	10.3°	237 119
3.0	1.09	162 79	10.3°	162 79

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 20.6°)

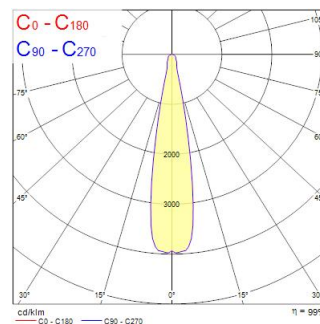

# BEACON XXL NB DALI 3K L3 BLK

Code article 2092994

Concord

## Données générales

Nom du produit	BEACON XXL NB DALI 3K L3 BLK
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Environment	Internal
General application	Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3713
Luminaire efficacy (lm/W)	77.35
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	93
Colour Consistency (SDCM)	3
Chromaticité réglable	N
Beam Angle (°)	21
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	48
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Type d'appareillage	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	1200
Courant d'appel (A)	30
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A B Breaker	13
Max. products per 16A B Breaker	20

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55500

## Données physiques

Housing colour	Black
IP rating	IP20
Diffuser finish	Diffuse
Diffuser material	PMMA Acrylic
Finition réflecteur	Not Applicable
Longueur (mm)	85
Largeur (mm)	168
Nominal Product Height (mm)	205
Poids (kg)	1.443

# BEACON XXL NB DALI 3K L3 BLK

Code article 2092994

**Concord**

## Emballage

Product EAN number	5025768929948
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768929948
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0