


Rocks IP65 33500lm 840 Aisle D4I ZDAST

Code article 2825859


Concord

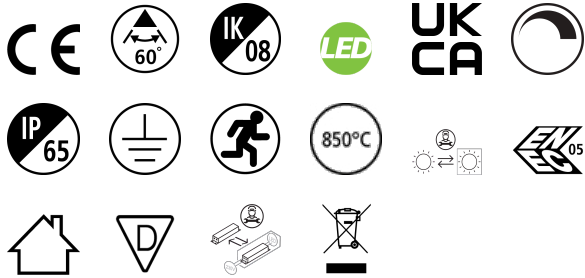

Logistics and Industry high bay luminaire with Aisle optics to provide necessary illumination for narrow areas, comes complete with 2000mm flying lead and 1000mm suspension cable, aluminium housing, PC diffuser, IP65, IK08, Class I, 4000K, CRI80, 3 step MacAdam ellipse, Zhaga Book 18 Ready, Integrated 3hrs DALI Self Test Emergency LiFePO4 unit, D4i driver, 33500lm, 175W, 191lm/W, 105.000hrs L80B50 lifespan, 446 x 481 x 144mm (LxWxD) dimensions, 4.72kg weight, RAL7012 Basalt Grey color, 0...+40°C operating temperature range.


Atouts techniques

Dimensions (mm)

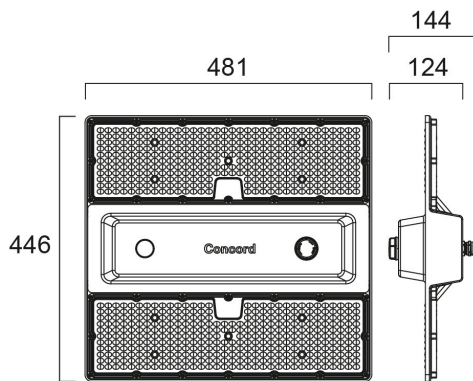

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.25 0.53	0.25	0.53	19712 8914 8914
1.0	0.55 1.06	0.55	1.06	4903 2379 2379
1.5	0.83 1.60	0.83	1.60	3230 1547 1547
2.0	1.10 2.13	1.10	2.13	1242 620 620
2.5	1.35 2.66	1.35	2.66	795 387 387
3.0	1.65 3.19	1.65	3.19	556 268 268



Rocks IP65 33500lm 840 Aisle D4I ZDAST

Code article 2825859

Concord

Données générales

Nom du produit	Rocks IP65 33500lm 840 Aisle D4I ZDAST
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Suspended
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+35°C
ETIM Class	EC001716
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	33500
Luminaire efficacy (lm/W)	191
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	60
Distribution type	Asymmetric
Glare control	< 22
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	800

Caractéristiques électriques

Emergency type	
Emergency duration (h)	3
Consommation électrique totale (W)	175
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	8
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	D4i
Drive current (mA)	690
Courant d'appel (A)	17
Inrush Duration (µs)	1500
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	8
Max. products per 16A C Breaker	9
Max. products per 20A C Breaker	12
Max. products per 10A B Breaker	6
Max. products per 13A B Breaker	8
Max. products per 16A B Breaker	9
Max. products per 20A B Breaker	12

Rocks IP65 33500lm 840 Aisle D4I ZDAST

Code article 2825859

Concord

Durée de vie

Lifespan L70 B50	120000
Lifespan L70 B20	120000
Lifespan L70 B10	120000
Lifespan L80 B50	105000
Lifespan L80 B20	91000
Lifespan L80 B10	84000
Lifespan L90 B50	51000
Lifespan L90 B20	44000
Lifespan L90 B10	41000

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser material	PC Polycarbonate
Finition réflecteur	Matt
Longueur (mm)	481
Largeur (mm)	446
Nominal Product Height (mm)	144
Poids (kg)	4.865

Emballage

Product EAN number	5025768258598
Longueur simple de l'emballage (cm)	54.0
Largeur simple de l'emballage (cm)	50.0
Packaging single depth (cm)	23.0
Units per outer package	1
Packaging outer length / height (cm)	54.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	23.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	5-35