

Syl-Lighter LED II 195 RO 15W NW


Code article 3031809



Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1480LM, 15W, 99lm/W, 4000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 55x195mm, 0.45kg, RAL9003, Class 2, 220-240V,


Atouts techniques

Dimensions (mm)

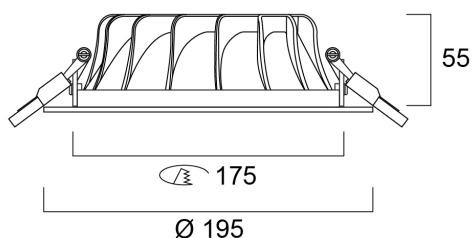

Photométrie

Distance (m)	Cone diameter (m)	Beam angle (°)	Beam diameter (m)	Beam diameter (ft)	Illuminance (lx)
0.5	0.81	74°	0.81	2.66	3013
1.0	1.62	74°	1.62	5.31	750
1.5	2.43	74°	2.43	7.94	196
2.0	3.24	74°	3.24	10.63	98
2.5	4.05	74°	4.05	13.28	63
3.0	4.86	74°	4.86	15.93	44



Syl-Lighter LED II 195 RO 15W NW

Code article 3031809

Données générales

Nom du produit	Syl-Lighter LED II 195 RO 15W NW
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
Operating temperature range (°C)	-10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4271247
Numéro virtuel SE	7467121
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1480
Luminaire efficacy (lm/W)	99
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Chromaticité réglable	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	15
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	390
Courant d'appel (A)	7.52
Inrush Duration (µs)	830
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	22
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	34
Max. products per 20A C Breaker	42

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

Syl-Lighter LED II 195 RO 15W NW

Code article 3031809

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Longueur (mm)	195
Largeur (mm)	195
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	195
Poids (kg)	0.555
Recessed Depth (mm)	150

Emballage

Product EAN number	8711971318095
Longueur simple de l'emballage (cm)	22.6
Largeur simple de l'emballage (cm)	22.63
Packaging single depth (cm)	6.5
DUN14 (inner)	18711971318092
Units per outer package	12
Packaging outer length / height (cm)	47.5
Packaging outer width (cm)	47.5
Packaging outer depth (cm)	23.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-10-25