


# SYL-LIGHTER II 220 21W NW DALI


Code article 3031846

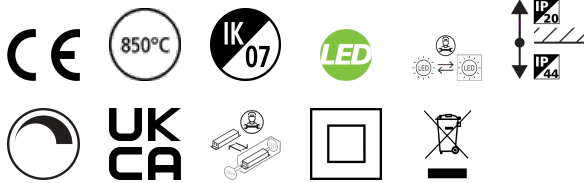

Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2102LM, 21W, 100lm/W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, Dali dimmable LED driver (Tridonic 28000675), IP44 from the front, IK07, (HxW) 60x205mm, 0.60kg, RAL9003, Class 2, 220-240V,

## Atouts techniques


### Dimensions (mm)

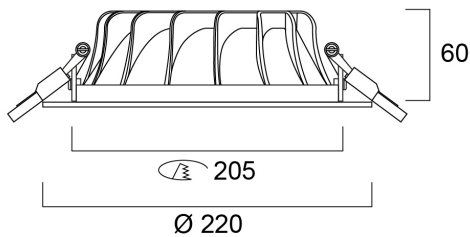

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.82	74°	433
1.0	1.63	74°	108
1.5	2.45	74°	48
2.0	3.26	74°	30
2.5	4.08	74°	21
3.0	4.89	74°	16

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 74.4°)

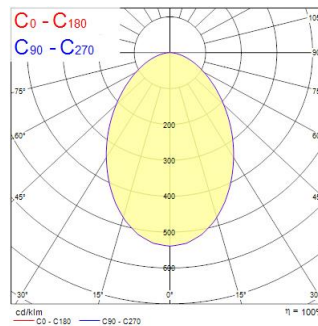

# SYL-LIGHTER II 220 21W NW DALI

Code article 3031846

## Données générales

Nom du produit	SYL-LIGHTER II 220 21W NW DALI
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Interior
General application	Hospitality
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4270285
Numéro virtuel SE	7470959
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	2102
Luminaire efficacy (lm/W)	100
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Consistency (SDCM)	5
Beam Angle (°)	74
Distribution type	Symmetric
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	21
Lamp power factor	0.96
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	Other
Montage de l'appareillage	Remote
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	600
Courant d'appel (A)	26
Inrush Duration (µs)	151
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	43
Max. products per 16A C Breaker	53
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	19
Max. products per 13A B Breaker	26
Max. products per 16A B Breaker	32
Max. products per 20A B Breaker	40

## Durée de vie

Lifespan L70 B50 | 50000

# SYL-LIGHTER II 220 21W NW DALI

Code article 3031846

## Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Other
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	220
Poids (kg)	0.757

## Emballage

Product EAN number	8711971318460
Longueur simple de l'emballage (cm)	25.3
Largeur simple de l'emballage (cm)	25.3
Packaging single depth (cm)	7.2
DUN14 (inner)	18711971318460
Units per outer package	12
Packaging outer length / height (cm)	52.4
Packaging outer width (cm)	52.6
Packaging outer depth (cm)	23.8

## Sécurité

Glow Wire Test (°C)	850
---------------------	-----