


Insaver 150 HE Topper LED WW

Code article 3033918

SYLVANIA


PROTM

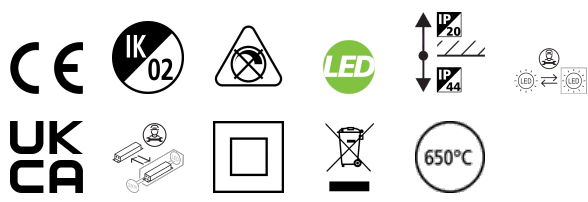

Insaver HE Topper is a ceiling recessed LED downlight with cut-out of 145mm. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm.

Atouts techniques


Dimensions (mm)

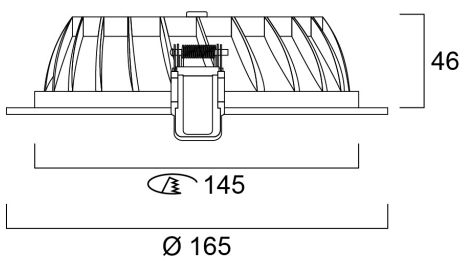

Photométrie

Distance [m]	Cone diameter [m]	E171 E100	180° 35.4°	1939 520
0.5	0.71	E171 E100	35.4°	205 132
1.0	1.42	E171 E100	35.4°	215 58
1.5	2.13	E171 E100	35.4°	121 33
2.0	2.84	E171 E100	35.4°	78 21
2.5	3.55	E171 E100	35.4°	64 16
3.0	4.26	E171 E100	35.4°	54 14

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 70.8°)
Illuminance [lx]



Insaver 150 HE Topper LED WW

Code article 3033918

SYLVANIA

Données générales

Nom du produit	Insaver 150 HE Topper LED WW
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Chromaticité réglable	N
Beam Angle (°)	64
Glare control	< 25

Caractéristiques électriques

Consommation électrique totale (W)	8
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class II
Type d'appareillage	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Durée de vie

Lifespan L70 B50	90000
Lifespan L80 B20	90000
Lifespan L90 B10	39000

Données physiques

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Other
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Poids (kg)	0.6

Emballage

Product EAN number	8711971339182
Longueur simple de l'emballage (cm)	17.0
Largeur simple de l'emballage (cm)	17.0
Packaging single depth (cm)	10.8
DUN14 (inner)	18711971339189
Units per outer package	18
Packaging outer length / height (cm)	56.5
Packaging outer width (cm)	35.5
Packaging outer depth (cm)	35.5

Sécurité

Glow Wire Test (°C)	650
---------------------	-----