


INSAVER 150 HE TOPPER LED WW PIR PLUS3

Code article 3033924

SYLVANIA


PROTM

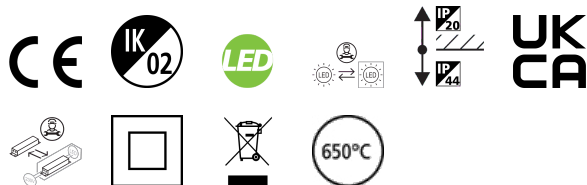

Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm. Wieland GST compatible.

Atouts techniques


Dimensions (mm)

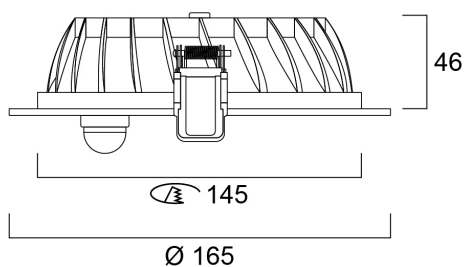

Photométrie

Distance [m]	Cone diameter [m]	E171 E271	180° 35.4°	180° 55°
0.5	0.71	1939	132	559
1.0	1.42	486	132	132
1.5	2.13	215	132	88
2.0	2.84	121	132	51
2.5	3.55	73	132	31
3.0	4.26	54	132	18

Distance [m] Cone diameter [m]
 — C0 - C180 (Half beam angle: 70.8°)
 Illuminance [lx]



INSAVER 150 HE TOPPER LED WW PIR PLUS3

Code article 3033924

SYLVANIA

Données générales

Nom du produit	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Chromaticité réglable	N
Beam Angle (°)	64

Caractéristiques électriques

Consommation électrique totale (W)	8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Type d'appareillage	Electronic ballast
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E

Données physiques

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Finition réflecteur	Other
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Poids (kg)	0.7

Emballage

Product EAN number	8711971339243
Longueur simple de l'emballage (cm)	25.0
Largeur simple de l'emballage (cm)	17.0
Packaging single depth (cm)	14.0
DUN14 (inner)	18711971339240
Units per outer package	12
Packaging outer length / height (cm)	78.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	31.0

Sécurité

Glow Wire Test (°C)	650
---------------------	-----