


GIOTTO 335 4000K RECESSED EMERGENCY

Code article 3034814

SYLVANIA


PROTM

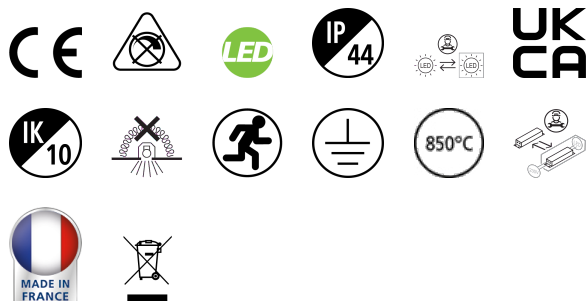

Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2350 lm, 21.6W, 109lm/W, 4000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V. Tp(a) rated diffuser that self-extinguishes within 5 sec when a flame has been removed.

Atouts techniques


Dimensions (mm)

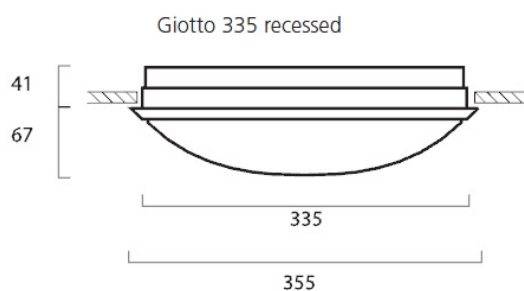

Photométrie

Distance (m)	Cone diameter (m)	Beam angle (°)	Beam angle (°)	Illuminance (lx)
0.5	1.57	50°	50°	2350
1.0	3.14	50°	50°	735
1.5	4.71	50°	50°	333
2.0	6.28	50°	50°	181
2.5	7.85	50°	50°	116
3.0	9.42	50°	50°	81

Distance (m) Cone diameter (m)
C0 - C180 (half beam angle: 115.0°)



GIOTTO 335 4000K RECESSED EMERGENCY

Code article 3034814

SYLVANIA

Données générales

Nom du produit	GIOTTO 335 4000K RECESSED EMERGENCY
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	109
Température de couleur (K)	4000
Colour Code	840
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Chromaticité réglable	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 26
Photobiological Risk Group	RG0
Maintien du flux à la fin de la durée de vie nominale (lm)	80
Luminous flux (emergency) (lm)	155

Caractéristiques électriques

Emergency type	
Emergency duration (h)	3
Consommation électrique totale (W)	21.6
Primary Supply/Product voltage - min (V)	198.0
Primary Supply/Product voltage - max (V)	264.0
Lamp power factor	0.92
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Montage de l'appareillage	Integrated
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Courant d'appel (A)	40
Inrush Duration (µs)	400
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	30
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 16A B Breaker	18
Max. products per 20A B Breaker	62
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

GIOTTO 335 4000K RECESSED EMERGENCY

Code article 3034814

SYLVANIA

Durée de vie

Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L90 B50	74500

Données physiques

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	355
Built-in diameter (mm)	335
Poids (kg)	1.5
Recessed Depth (mm)	41

Emballage

Product EAN number	8711971348146
Longueur simple de l'emballage (cm)	35.7
Largeur simple de l'emballage (cm)	35.7
Packaging single depth (cm)	10.6
DUN14 (inner)	08711971348146
Units per outer package	1
Packaging outer length / height (cm)	35.7
Packaging outer width (cm)	35.7
Packaging outer depth (cm)	10.6

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	1-25