


Inverto Direct WW 1-10v Black


Code article 3080089

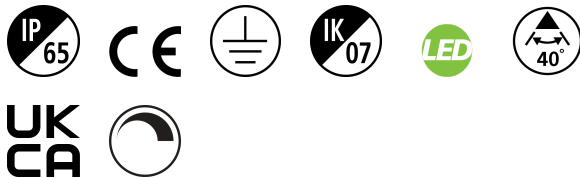

Surface Wall mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, black coloured aluminium housing, 1,617lm or 2,045lm, 16W or 19W, 102lm/W or 107lm/W, 3000K, 350mA or 450mA, CRI:80, 40° beam Angle, 1-10V dimmable, IP65, IK07, 50,000hrs (L70), 23.00x19.4x11.5mm.

Atouts techniques


Dimensions (mm)

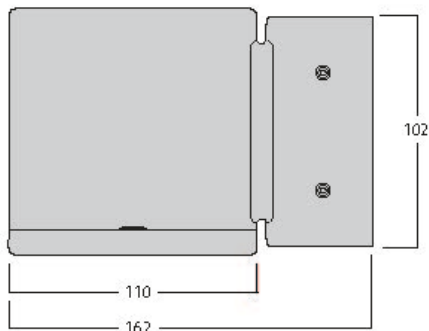

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.36	0.36	1285
1.0	0.72	0.72	314
1.5	1.08	1.08	136
2.0	1.44	1.44	75
2.5	1.80	1.80	48
3.0	2.16	2.16	32

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 39.6°)

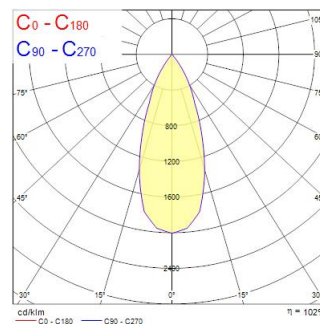

Inverto Direct WW 1-10v Black

Code article 3080089

Données générales

Nom du produit	Inverto Direct WW 1-10v Black
Technologie	LED
Housing	Aluminium
Montage	Wall surface mounted
Environment	Internal/External
General application	Hospitality
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Numéro virtuel FI	4579301
Numéro virtuel SE	7702956

Données optiques

Fixture luminous flux (lm)	1566 / 1980
Luminaire efficacy (lm/W)	98
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Consistency (SDCM)	3
Chromaticité réglable	N
Beam Angle (°)	40
Distribution type	Direct
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	16
Electrical protection	Class I
Type d'appareillage	Electronic ballast
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	5
Drive current (mA)	350
Courant d'appel (A)	45
Inrush Duration (µs)	20
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	80

Durée de vie

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	57300
Lifespan L90 B10	56100

Données physiques

Housing colour	RAL 9005 - Jet black
IP rating	IP65
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Longueur (mm)	162
Largeur (mm)	110
Nominal Product Height (mm)	110
Poids (kg)	1.461

Inverto Direct WW 1-10v Black

Code article 3080089

Emballage

Product EAN number	8711971800897
Longueur simple de l'emballage (cm)	23.5
Largeur simple de l'emballage (cm)	19.4
Packaging single depth (cm)	11.5
DUN14 (inner)	08711971800897
Units per outer package	1
Packaging outer length / height (cm)	23.5
Packaging outer width (cm)	19.4
Packaging outer depth (cm)	11.5

Sécurité

Condition de fonctionnement optimal (° C)	-25-25
---	--------