


Inverto Surface NW Eb White

Code article 3081074

SYLVANIA


PROTM

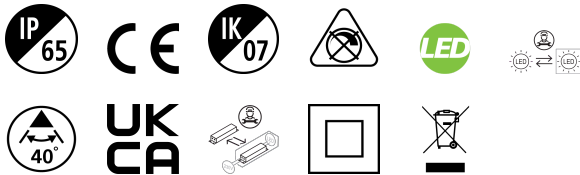

Surface Ceiling mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, white coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA, CRI:80, 40° beam Angle, non-dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 110 x 110 x 162 mm.

Atouts techniques


Dimensions (mm)

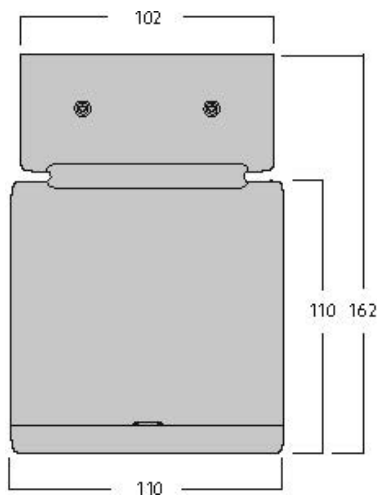

Photométrie

Distance [m]	Cone diameter [m]	E0° [lx]	E0° [fc]	E0° [cd]
0.5	0.36	12074	1381	8424
1.0	0.72	3019	345	2106
1.5	1.08	1442	165	993
2.0	1.44	811	93	559
2.5	1.80	519	60	371
3.0	2.16	360	41	252

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 39.6°)
Illuminance [lx]

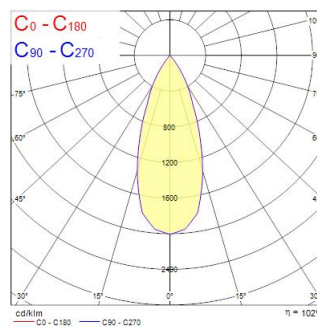

Inverto Surface NW Eb White

Code article 3081074

SYLVANIA

Données générales

Nom du produit	Inverto Surface NW Eb White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling surface mounting
Environment	Internal/External
General application	Hospitality
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Numéro virtuel FI	4579344
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Consistency (SDCM)	3
Chromaticité réglable	N
Beam Angle (°)	40
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	16
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class II
Type d'appareillage	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Courant d'appel (A)	10
Inrush Duration (µs)	152
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	75
Max. products per 13A C Breaker	91
Max. products per 16A C Breaker	106
Max. products per 20A C Breaker	126
Max. products per 10A B Breaker	45
Max. products per 13A B Breaker	55
Max. products per 16A B Breaker	64
Max. products per 20A B Breaker	76

Durée de vie

Lifespan L70 B50	60000
Lifespan L80 B20	60000
Lifespan L90 B10	56100

Inverto Surface NW Eb White

Code article 3081074

SYLVANIA

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Longueur (mm)	110
Largeur (mm)	110
Nominal Product Height (mm)	162
Poids (kg)	1.479

Emballage

Product EAN number	8711971810742
Longueur simple de l'emballage (cm)	18.5
Largeur simple de l'emballage (cm)	24.5
Packaging single depth (cm)	11.5
DUN14 (inner)	08711971810742
Units per outer package	1
Packaging outer length / height (cm)	18.5
Packaging outer width (cm)	24.5
Packaging outer depth (cm)	11.5

Sécurité

Condition de fonctionnement optimal (° C)	-25-25
-------------------------------------------	--------