
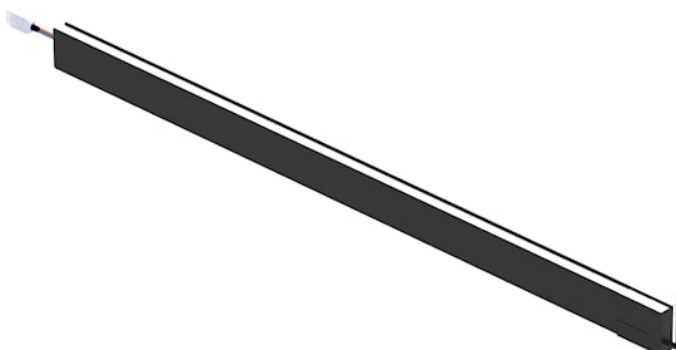


OT H-Trk Ready Starter 930 DALI BI H32S1405/b5-o-2

Code article 9200423


Concord

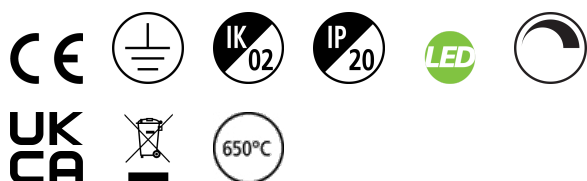

H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H-Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, light beam angle: 112°. Textured white finishing colour. Light color temperature: 3000K, warm white, Total system power: 34.5W. Fixture lumen output: 2384lm, efficacy: 69lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driver. Track part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm


Atouts techniques

Dimensions (mm)

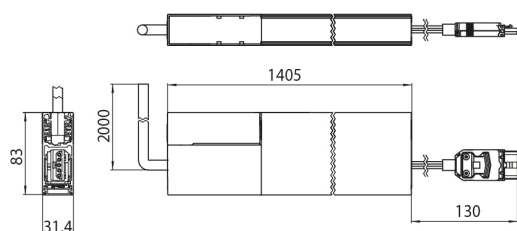

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Beam angle [°]
3.0	8.93 8.76	5100° 5100°	123.9° 123.9°	95 9
2.5	7.44 7.30	5100° 5100°	123.9° 124.4°	131 12
2.0	5.95 5.84	5100° 5100°	123.9° 124.4°	214 19
1.5	4.46 4.33	5100° 5100°	123.9° 124.4°	380 34
1.0	2.98 2.92	5100° 5100°	123.9° 124.4°	886 78
0.5	1.49 1.46	5100° 5100°	123.9° 124.4°	3423 286 310



OT H-Trk Ready Starter 930 DALI BI H32S1405/b5-o-2

Code article 9200423

Concord

Données générales

Nom du produit	OT H-Trk Ready Starter 930 DALI BI H32S1405/b5-o-2
Technologie	LED
Cap/Base	N/A
Montage	Suspended
Built in presence detector	NONE
Operating temperature range (°C)	1°C...+25°C
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2384
Luminaire efficacy (lm/W)	69
LOR (%)	100
Colour Code	930
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	112
Distribution type	Diffuse
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Courant d'appel (A)	10
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	F
Max. products per 10A C Breaker	31
Max. products per 16A C Breaker	51
Max. products per 16A B Breaker	30
Connectable conductor cross section - Min (mm²)	7.5
Connectable conductor cross section - Max (mm²)	7.5

Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK02
Longueur (mm)	1405
Largeur (mm)	31.4
Nominal Product Height (mm)	83
Poids (kg)	4.0

OT H-Trk Ready Starter 930 DALI BI H32S1405/b5-o-2

Code article 9200423

Concord

Emballage

Description de l'emballage	Carton
Product EAN number	4012289004231
Longueur simple de l'emballage (cm)	10.0
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	150.0
Units per outer package	1
Packaging outer length / height (cm)	10.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	150.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-25