

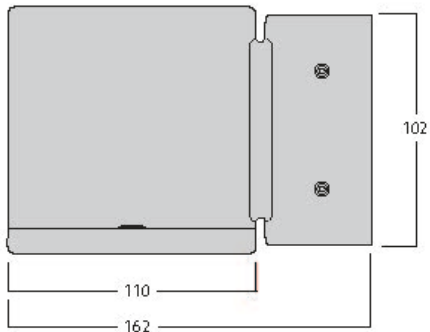


PRO™

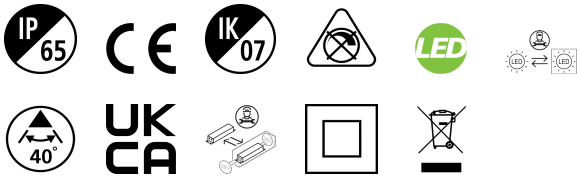

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.36	0.071 / 19.9"	1288 / 520
1.0	0.72	0.141 / 19.9"	314 / 123
1.5	1.08	0.196 / 19.9"	136 / 54
2.0	1.44	0.235 / 19.9"	78 / 33
2.5	1.80	0.270 / 19.9"	53 / 21
3.0	2.16	0.297 / 19.9"	38 / 16

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 36.9°)



|