



PROTM

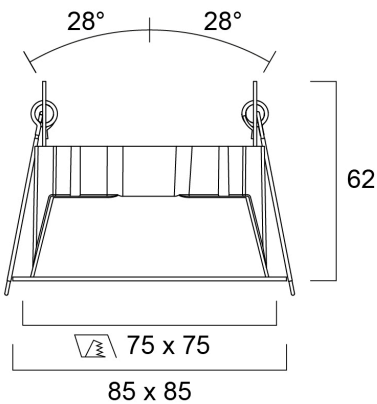

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	0.32 0.20	0.32 0.20	12.3" 11.1"	9521 4484
1.0	0.44 0.39	0.44 0.39	12.3" 11.1"	2405 1153
1.5	0.65 0.59	0.65 0.59	12.3" 11.1"	1069 499
2.0	0.87 0.78	0.87 0.78	12.3" 11.1"	601 281
2.5	1.09 0.98	1.09 0.98	12.3" 11.1"	388 180
3.0	1.31 1.18	1.31 1.18	12.3" 11.1"	297 137

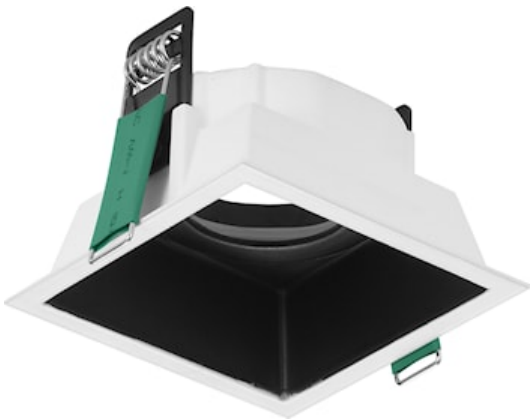