

Pixo Line 1500 90D Beam 840 Black

Cikkszám 0007822

SYLVANIA


PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90° Textured black finishing colour. Light color temperature: 4000K, neutral white, max. system power: 50W Max. fixture lumen output: 7400lm, efficacy: 148lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L. 1464mm x 38.4mm x 37mm

Műszaki eszközök

Méretetek (mm)

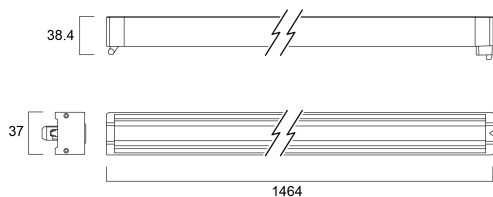

Fotometriák

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.01 1.39	60° 45° 30°	15054 1777 1039
1.0	2.02 2.77	60° 45° 30°	3886 444 257
1.5	3.03 4.16	60° 45° 30°	1140 137 114
2.0	4.04 5.55	60° 45° 30°	542 111 54
2.5	5.05 6.93	60° 45° 30°	411 71 41
3.0	6.06 8.32	60° 45° 30°	288 48 26

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 105.4°)
— C90 - C270 (Half beam angle: 90.0°)

Pixo Line 1500 90D Beam 840 Black

Cikkszám 0007822



Fizikai adatok

Ház színe	Fekete
IP-besorolás	IP20
IK besorolás	IK03
Névleges termék hossz (mm)	1464
Névleges termék szélesség (mm)	37
Névleges termék magasság (mm)	38.4
Súly (kg)	0.9

Csomagolás

Termék EAN-kódja	5410288078229
Egyedi csomagolás hossza / magassága (cm)	147.0
Egyedi csomagolás szélessége (cm)	4.3
Egyedi csomagolás mélysége (cm)	4.3
DUN14 (belső)	15410288078226
Mennyiség egy külső csomagban	10
Gyűjtő csomagolás hossza / magassága (cm)	149.0
Gyűjtő csomagolás szélessége (cm)	24.0
Gyűjtő csomagolás mélysége (cm)	11.0

Biztonsági adatok

Izzószál teszt (°C)	650
Optimális működési feltétel (°C)	-20-40