



PRO

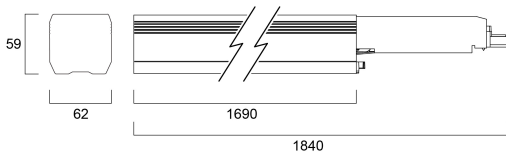

Distance [m]	Cone diameter [m]	Beam diameter [mm]	Illuminance [lx]
0.5	0.96	Ø171	106
	0.96	Ø169	108
1.0	1.72	Ø171	278
	1.92	Ø169	281
1.5	2.56	Ø171	123
	2.89	Ø169	126
2.0	3.44	Ø171	68
	3.85	Ø169	70
2.5	4.30	Ø171	44
	4.81	Ø169	45
3.0	5.16	Ø171	31
	5.77	Ø169	32

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 87.8°)
 — C90 - C270 (Half beam angle: 81.4°)



|
