
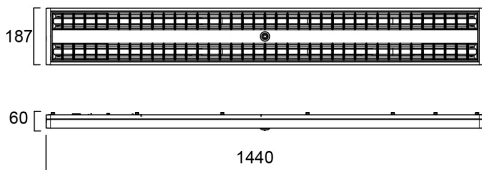


PRO

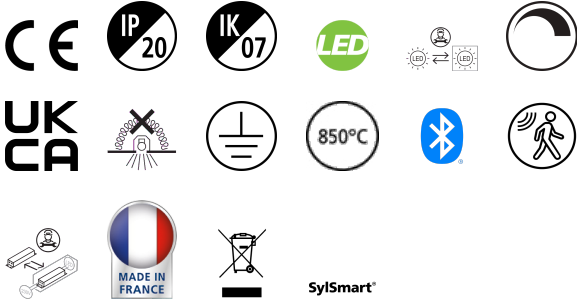

| Distance [m] | Cone diameter [m] | Beam diameter [m] | Beam diameter [ft] | Illuminance [lx] |
|--------------|-------------------|-------------------|--------------------|------------------|
| 0.5 | 0.90 | 0.68 | 2.23 | 2096 |
| | | | 2.23 | 460 |
| 1.0 | 1.79 | 1.37 | 4.17 | 524 |
| | | | 4.17 | 125 |
| 1.5 | 2.69 | 2.05 | 6.72 | 303 |
| | | | 6.72 | 54 |
| 2.0 | 3.59 | 2.74 | 9.00 | 141 |
| | | | 9.00 | 29 |
| 2.5 | 4.49 | 3.42 | 11.29 | 90 |
| | | | 11.29 | 19 |
| 3.0 | 5.38 | 4.11 | 13.57 | 60 |
| | | | 13.57 | 13 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 66.8°)

— C90 - C270 (Half beam angle: 63.8°)

