




PRO

TM

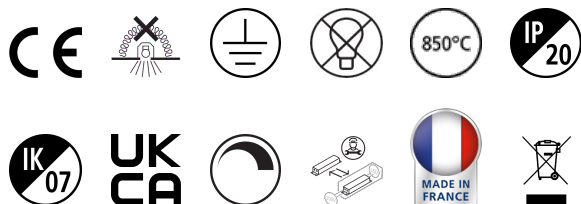

595

595

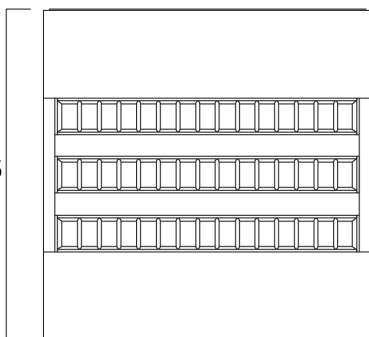

0.5	1.28 1.06	507 507 507	21428 3028 1039
1.0	2.56 2.10	507 507 507	5357 757 1780
1.5	3.84 3.15	507 507 507	2281 328 782
2.0	5.12 4.20	507 507 507	1139 169 440
2.5	6.40 5.25	507 507 507	887 121 302
3.0	7.68 6.30	507 507 507	590 84 196

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 92.8°)
— C90 - C270 (Half beam angle: 104.0°)

