




PRO

TM

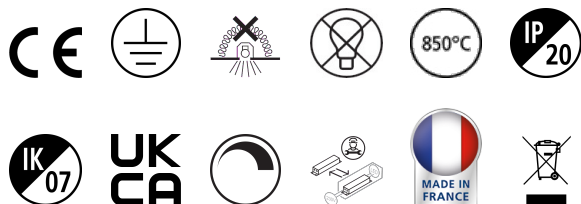

621

621

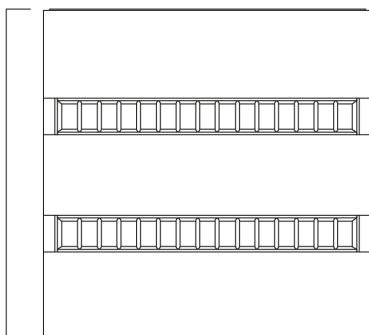

0.5	1.29 1.06	5071 5071 5071	1388 1388 1388
1.0	2.59 2.12	5071 5071 5071	2648 2648 2648
1.5	3.88 3.18	5071 5071 5071	1176 1176 1176
2.0	5.18 4.24	5071 5071 5071	892 892 892
2.5	6.47 5.31	5071 5071 5071	433 433 433
3.0	7.76 6.37	5071 5071 5071	294 294 294

Distance [m] Cone diameter [m]
 — C0 - C180 (Half beam angle: 90.4°)
 — C90 - C270 (Half beam angle: 104.6°)

Illuminance [lx]

