


# Concord



|                                       |                   |                     |                       |
|---------------------------------------|-------------------|---------------------|-----------------------|
| 0.5                                   | 0.71<br>0.94      | E07<br>E100<br>E100 | 35 lx<br>42 lx<br>146 |
| 1.0                                   | 1.42<br>1.88      | E07<br>E100<br>E100 | 168<br>81<br>17       |
| 1.5                                   | 2.13<br>2.82      | E07<br>E100<br>E100 | 112<br>42<br>16       |
| 2.0                                   | 2.84<br>3.76      | E07<br>E100<br>E100 | 81<br>31<br>9         |
| 2.5                                   | 3.55<br>4.70      | E07<br>E100<br>E100 | 60<br>26<br>8         |
| 3.0                                   | 4.26<br>5.63      | E07<br>E100<br>E100 | 51<br>26<br>7         |
| Distance [m]                          | Cone diameter [m] |                     | Illuminance [lx]      |
| — C0 - C180 (Half beam angle: 96.4°)  |                   |                     |                       |
| — C90 - C270 (Half beam angle: 70.5°) |                   |                     |                       |

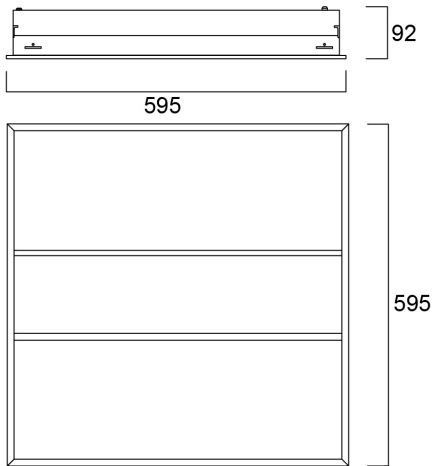