




**PRO**<sup>TM</sup>

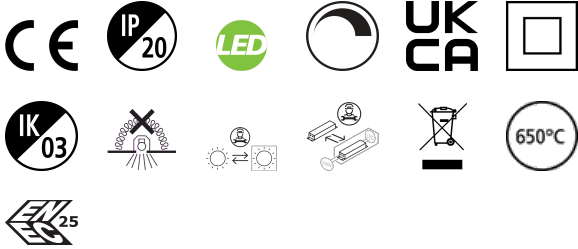



Distance [m]	Cone diameter [m]		Illuminance [lx]		
	— C0 - C180 (Half beam angle: 15.8°)	— C90 - C270 (Half beam angle: 16.8°)	E(0°)	E(C90)	E(C270)
0.5	0.15 0.14		4213	2358	2358
1.0	0.30 0.27		1213	590	590
1.5	0.44 0.41		543	269	269
2.0	0.59 0.55		305	150	150
2.5	0.74 0.68		199	94	94
3.0	0.89 0.82		133	62	62

