



PROTM

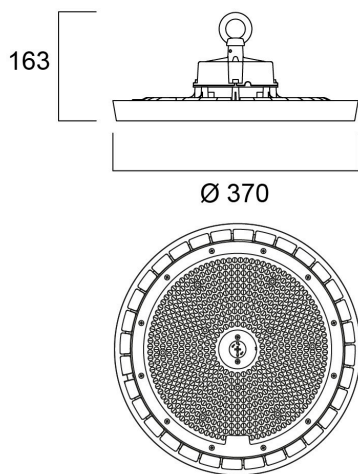

0.5	0.49	S10° E100°	13459 48798
1.0	0.98	S10° E100°	3360 12184
1.5	1.48	S10° E100°	1481 5415
2.0	1.97	S10° E100°	843 3048
2.5	2.46	S10° E100°	592 1949
3.0	2.95	S10° E100°	473 1754

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 90 °)

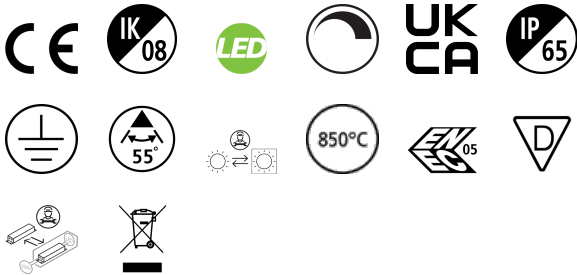