


**PRO**<sup>TM</sup>

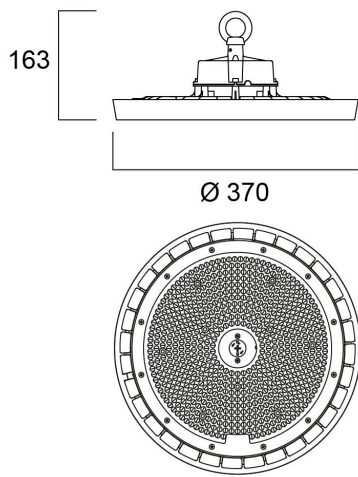

0.5	0.86	SI7 E100	40°	3024 1950
1.0	1.73	SI7 E100	40°	1512 975
1.5	2.59	SI7 E100	40°	1008 650
2.0	3.45	SI7 E100	40°	756 487
2.5	4.32	SI7 E100	40°	605 394
3.0	5.18	SI7 E100	40°	504 328

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 91.6°)

