


# Granit Zelftest Noodkit

Artikelnummer 0039783

**SYLVANIA**


**PRO**<sup>TM</sup>



3hrs Self test Maintained emergency KIT with LiFePO4 battery compatible with Granit highbays. Providing 800lm for 0-10V Granit G2 (0039730 - 0039741) and 1,200lm for DALI / SSA Granit G2 (0039749 - 0039760;0038766 - 0038772; 0039766 - 0039772). 1200lm for all Granit G3 (0039110-0039153). 0 to +50°C operating temperature range. Up to 7W consumption for charging the battery. The battery is LiFePO4 6.4V / 6.6Ah / 42.24Wh - charging current is up to 400mA.

## Technische gegevens

### Afmetingen (mm)

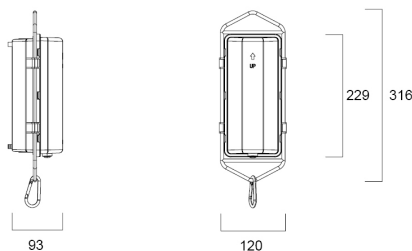

### Fotometrie

### Algemene gegevens

|                           |                         |
|---------------------------|-------------------------|
| Productnaam               | Granit Zelftest Noodkit |
| Technologie               | Emergency Pack          |
| Algemene toepassing       | Logistiek & Industrie   |
| Omgevingstemperatuur (°C) | 0°C...+50°C             |
| ETIM klasse               | EC000471                |
| E-nummer FI               | 4357206                 |
| Garantie                  | 5 jaar                  |

### Elektrische gegevens

|                                |          |
|--------------------------------|----------|
| Nood type                      |          |
| Nood duur (u)                  | 3        |
| Primaire voedingsspanning min  | 220.0    |
| Primaire voedingsspanning max  | 240.0    |
| Elektrische beschermingsklasse | Klasse 1 |

### Fysieke gegevens

|              |       |
|--------------|-------|
| IP waarde    | IP65  |
| Gewicht (kg) | 1.097 |

# Granit Zelftest Noodkit

Artikelnummer 0039783

**SYLVANIA**

## Verpakkingen

|                                |                |
|--------------------------------|----------------|
| EAN code                       | 5410288397832  |
| Enkele lengte verpakking (cm)  | 42.0           |
| Enkele breedte verpakking (cm) | 15.5           |
| Hoogte eenheidsverpakking (cm) | 11.0           |
| DUN14 (inner)                  | 15410288397839 |
| Eenheden per omdoos            | 6              |
| Lengte omdoos (cm)             | 44.0           |
| Breedte omdoos (cm)            | 36.0           |
| Diepte omdoos (cm)             | 34.0           |

## Veiligheidsgegevens

|                                      |      |
|--------------------------------------|------|
| Optimale bedrijfsomstandigheden (°C) | 0-50 |
|--------------------------------------|------|