
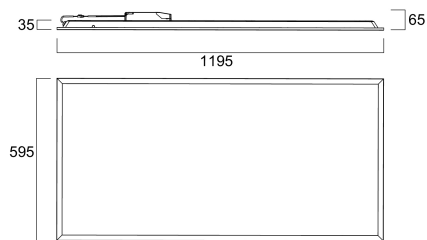


PRO

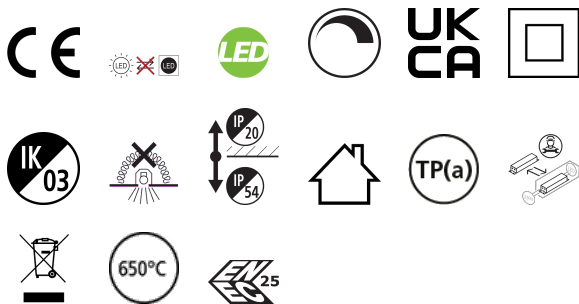

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.95	82.6°	1.195	3.92	11391
1.0	1.90	82.6°	2.39	7.84	2845
1.5	2.85	82.6°	3.58	11.76	1286
2.0	3.80	82.6°	4.78	15.68	643
2.5	4.75	82.6°	5.98	19.60	321
3.0	5.70	82.6°	7.17	23.52	160

Distance [m] Cone diameter [m] Beam angle [°] Beam diameter [m] Beam diameter [ft] Illuminance [lx]

— C0 - C180 (Half beam angle: 82.6°)

— C90 - C270 (Half beam angle: 89.4°)

