


PRO

TM

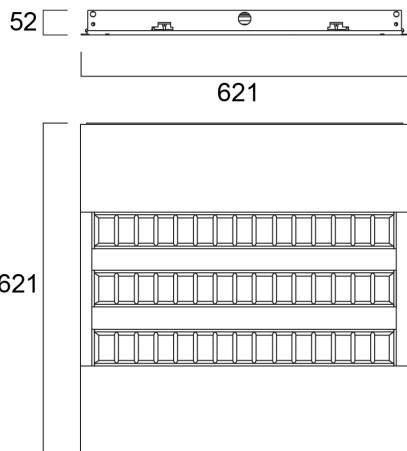

0.5	1.28 1.05	50° 50° 48.4°	21428 3028 1039
1.0	2.56 2.10	50° 50° 48.4°	5357 757 1780
1.5	3.84 3.15	50° 50° 48.4°	2281 326 792
2.0	5.12 4.20	50° 50° 48.4°	1139 169 440
2.5	6.40 5.25	50° 50° 48.4°	897 131 330
3.0	7.68 6.30	50° 50° 48.4°	590 84 196

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 90.8°)
— C90 - C270 (Half beam angle: 104.0°)

