



PRO

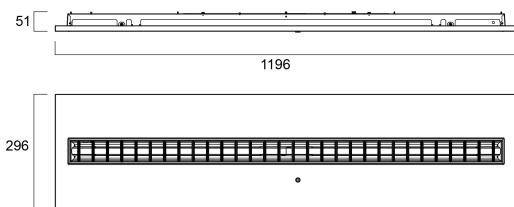

Distance [m]	Cone diameter [m]	Beam diameter [mm]	Beam diameter [inches]	Illuminance [lx]
0.5	0.91	Ø171	6.74"	9570
	0.69	Ø150	5.91"	1861
1.0	1.83	Ø171	6.74"	2380
	1.38	Ø150	5.91"	483
1.5	2.74	Ø171	6.74"	1080
	2.07	Ø150	5.91"	215
2.0	3.65	Ø171	6.74"	598
	2.76	Ø150	5.91"	151
2.5	4.57	Ø171	6.74"	380
	3.45	Ø150	5.91"	107
3.0	5.48	Ø171	6.74"	298
	4.14	Ø150	5.91"	84

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 69.2°)
 — C90 - C270 (Half beam angle: 64.8°)

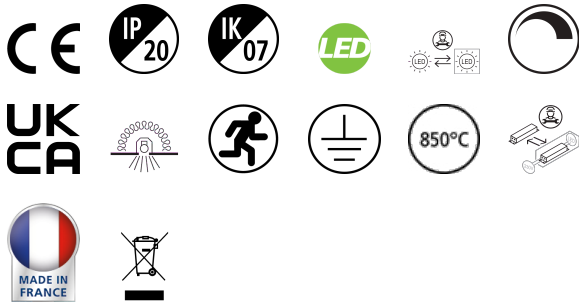