



START

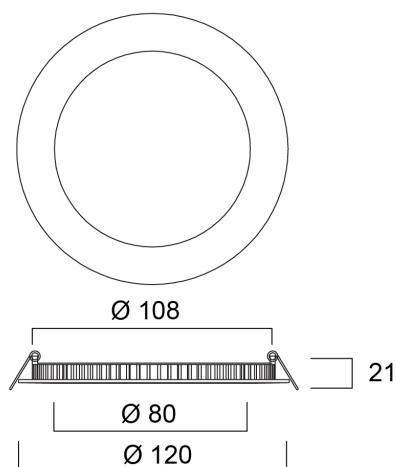

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.41 1.43	50° 54° 55°	881 88 88
1.0	2.81 2.86	50° 54° 55°	220 22 22
1.5	4.22 4.28	50° 54° 55°	98 10 9
2.0	5.63 5.71	50° 54° 55°	48 5 4
2.5	7.04 7.14	50° 54° 55°	38 4 3
3.0	8.44 8.57	50° 54° 55°	31 3 2

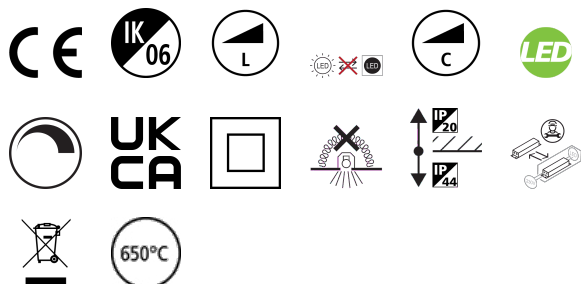