


LSF EM PACK MT 50-200V LIFEPO4 3H3W RC


Artikelnummer 9146604

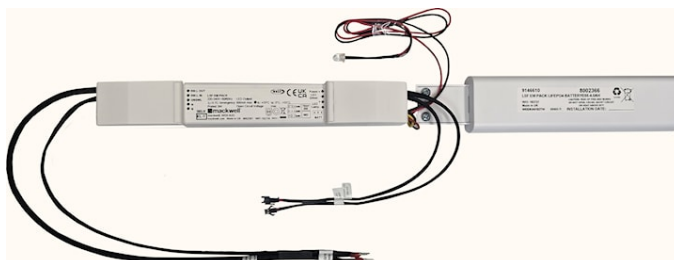

LiFeSafe Emergency conversion Kit Rapid Connector (RC) is a luminaire accessory designed to enable your general lighting to be able to offer light output even in emergency situations through a battery backup pack. This kit comes with Rapid connectors to be compatible with Sylvania luminaires with a Rapid Connector for High voltage 50-300V LED board. This product contains a Manual Test only emergency inverter pre-wired with rapid connectors, LED bi-colour indicator, Two indicator holders (in-ceiling and in-luminaire) and a LiFePO4 battery pack to deliver 3W, 3 hours of light output. Please note this is not compatible with luminaires without rapid connector and note this pack is not EN60598-2-22 compliant alone and must be used in conjunction with a tested and approved luminaire. Emergency lighting design calculations as well as a risk assessment must be undertaken by the responsible person. Spare battery available on code 9146610 (E55-4AH)

Technische gegevens

Afmetingen (mm)

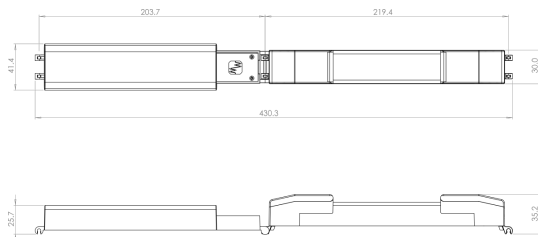

Fotometrie

Algemene gegevens

Productnaam	LSF EM PACK MT 50-200V LIFEPO4 3H3W RC
Technologie	Emergency Pack
Algemene toepassing	Onderwijs, Horeca, Museums en galerieën, Kantoor, Winkel
Omgevingstemperatuur (°C)	0°C...+55°C
ETIM klasse	EC000471
Garantie	5 jaar

Elektrische gegevens

Noodbedrijf	Non-Maintained
Nood type	
Nood duur (u)	3
Primaire voedingsspanning min	220.0
Primaire voedingsspanning max	240.0
Lamp arbeidsfactor	0.65
Elektrische beschermingsklasse	Klasse II

LSF EM PACK MT 50-200V LIFEPO4 3H3W RC

Artikelnummer 9146604

Aansluitbare geleider doorsnede min	0.5
Aansluitbare geleider doorsnede max	1.5
Fysieke gegevens	
Kleur behuizing	Wit
Lengte (mm)	423.1
Breedte (mm)	41.4
Hoogte (mm)	35.2
Gewicht (kg)	0.31

Verpakkingen

EAN code	3172670466046
Enkele lengte verpakking (cm)	28.2
Enkele breedte verpakking (cm)	9.3
Hoogte eenheidsverpakking (cm)	4.0
Eenheden per omdoos	1
Lengte omdoos (cm)	28.2
Breedte omdoos (cm)	9.3
Diepte omdoos (cm)	4.0

Veiligheidsgegevens

Gloeidraad test (°)	850
Optimale bedrijfsomstandigheden (°C)	0-55
Uitsluitend te gebruiken in droge toepassingen	Ja