


PRO
TM



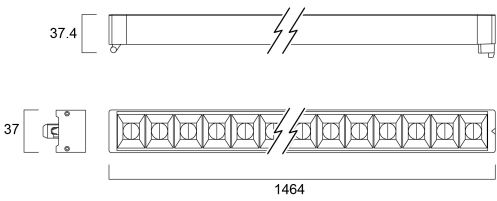

Distance [m]	Cone diameter [m]		
0.5	0.65 0.70	E(1) E(C90) E(C0)	2474 7142 889
1.0	1.30 1.40	E(1) E(C90) E(C0)	6044 1798 1871
1.5	1.95 2.09	E(1) E(C90) E(C0)	2688 794 753
2.0	2.61 2.79	E(1) E(C90) E(C0)	1511 448 419
2.5	3.26 3.49	E(1) E(C90) E(C0)	967 286 267
3.0	3.91 4.19	E(1) E(C90) E(C0)	672 198 186

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 65.9°)
— C90 - C270 (half beam angle: 66.2°)

