

Pixo Line 1500 D Asym 840 Black

Item No: 0007834




PROTM



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, traslucent double asymmetric optic diffuser, light beam angle:25° black finishing colour. Light color temperature: 4000K, max. system power: 50W Max. fixture lumen output: 7600lm, efficacy: 152lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx37mm

Technical Assets

Dimensions (mm)

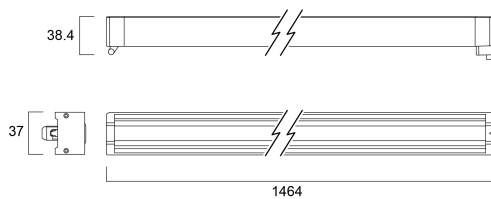

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.80 1.45	0.07 0.09	4025 2865
1.0	1.59 2.90	0.14 0.18	1106 913
1.5	2.39 4.35	0.21 0.27	482 415
2.0	3.18 5.80	0.28 0.36	277 238
2.5	3.96 7.25	0.35 0.44	177 166
3.0	4.77 8.70	0.42 0.52	133 121

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 110.0°)
 — C90 - C270 (Half beam angle: 77.0°)

Pixo Line 1500 D Asym 840 Black

Item No: 0007834

SYLVANIA

Physical data

Cor do corpo	Black
Proteção IP	IP20
Proteção IK	IK03
Comprimento nominal do produto (mm)	1464
Largura nominal do produto (mm)	37
Altura nominal do produto (mm)	38.4
Peso (kg)	0.9

Packaging

Código EAN	5410288078342
Comprimento / altura da embalagem individual (cm)	147.0
Largura da embalagem individual (cm)	4.3
Profundidade da embalagem individual (cm)	4.3
DUN14 (inner)	15410288078349
Unidades por embalagem exterior	10
Comprimento / altura da embalagem exterior (cm)	149.0
Largura da embalagem exterior (cm)	24.0
Profundidade da embalagem exterior (cm)	11.0

Safety data

Teste do fio incandescente (°C)	650
Condição ótima de funcionamento (°C)	-20-40