

Lynx-D Superia 18W/830 G24D-2 SLV

Item No: 0025910


SYLVANIA



- Compact and high performance double bend 2-bend pin lamp, - Suitable for operation on electronic control gear (DE type) and magnetic ballast (D version), - Dimmable with suitable dimmer, - Excellent colour rendering, - Suitable for emergency lighting

Technical Assets

Dimensions (mm)

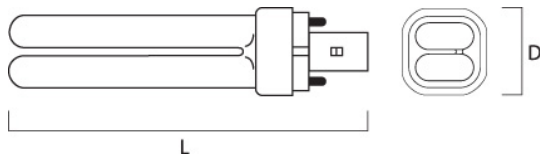

Photometrics

General data

Nome do produto	Lynx-D Superia 18W/830 G24D-2 SLV
Tecnologia	Fluorescent
Watt (Rated) (W)	18
Forma da lâmpada	Other
Casquilho	G24d-2
Acabamento da lâmpada	Frosted/Coated
Luminária	Open
Aplicação geral	Educação, Hotelaria, Logistics & Industry, Museums & Galleries, Escritórios, Retailo, Residential & Consumer
ETIM	EC000087
E-number FI	4944109
E-number SE	8357361

Optical data

Useful luminous flux (Φ_{use})	1210
Luminous flux (Rated) (lm)	1210
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	67
Ambient temperature for maximum luminous flux (°C)	25
Temperatura de cor (K)	3000
Cor da luz	Warm White
Colour Code	830
CRI	82
Variação da cor (SDCM)	SDCM5
Adjustable chromaticity	Não
Grupo de risco fotobiológico	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	78

Lynx-D Superia 18W/830 G24D-2 SLV

Item No: 0025910

SYLVANIA

Rated lumen maint. factor (%) at 8000 h 50Hz	75
Electrical data	
Power consumption (W)	18
Potência	18
Starting time (max) (s)	10 Sec
Supply current (A)	0.28
Tensão de alimentação do produto – mín. (V)	90
Tensão de alimentação do produto – máx. (V)	110
Control gear required	Yes
Regulável	No
Modo de regulação	N/A
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	18
Frequência nominal (Hz)	50/60Hz

Lifetime data

Vida média (horas)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	50
Rated survival factor (%) at 16000 h 50Hz	71

Physical data

Comprimento nominal do produto (mm)	153
Nominal Product Diameter (mm)	35
Max. Length base to base (mm) - A	153
Max. Lamp Diameter (mm) - D	13
Peso (kg)	0.063

Packaging

Código EAN	5410288259109
Comprimento / altura da embalagem individual (cm)	15.5
Largura da embalagem individual (cm)	3.6
Profundidade da embalagem individual (cm)	3.6
DUN14 (inner)	15410288259106
Unidades por embalagem exterior	10
Comprimento / altura da embalagem exterior (cm)	16.6
Largura da embalagem exterior (cm)	8.0
Profundidade da embalagem exterior (cm)	18.7

Safety data

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes