

ToLEDo RT GLS V4 ST 806LM 827 E27 SL

Item No: 0027312


SYLVANIA



- Perfect for decorative and general lighting applications and creates a warm ambiance similar to traditional lamps
- Same look, size and functionality as incandescent lamps
- Omni-directional light distribution
- A++ energy rating
- Suitable replacement for incandescent and halogen lamps
- Gives same sparkling light effect as incandescent lamp
- Dimensionally identical to incandescent lamps - fits all fixtures
- Environment friendly - no mercury and lower CO2 emissions

Technical Assets

Dimensions (mm)

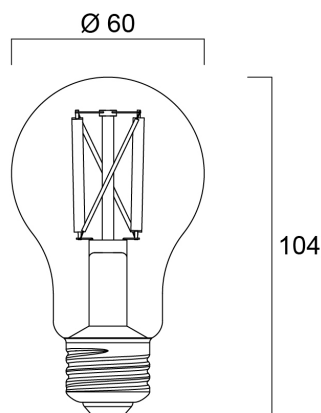

Photometrics

ToLEDo RT GLS V4 ST 806LM 827 E27 SL

Item No: 0027312

SYLVANIA

General data

| | |
|---|--------------------------------------|
| Nome do produto | ToLEDo RT GLS V4 ST 806LM 827 E27 SL |
| Tecnologia | LED |
| Watt (Rated) (W) | 7 |
| Casquilho | E27 |
| Luminária | Open |
| Aplicação geral | Hotelaria, Residencial & Consumer |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM | EC001959 |
| E-number FI | 4740491 |
| Garantia | 3 years |

Optical data

| | |
|--|-----------|
| Useful luminous flux (Φ _{use}) | 806 |
| Luminous flux (Rated) (lm) | 806 |
| Temperatura de cor (K) | 2700 |
| Cor da luz | Homelight |
| CRI | 80 |
| Lumen maintenance at end of nominal life (%) | 70 |

Electrical data

| | |
|---|---------|
| Power consumption (W) | 7 |
| Potência | 7 |
| Starting time (max) (s) | 0.5 |
| Warm-up time to 60% of full light (max) (s) | 1 |
| Fator de potência | 0.5 |
| No. Of switching cycles before premature failures | >50000 |
| Corrente de arranque (A) | 3.9 |
| Frequência nominal (Hz) | 50/60Hz |
| Máx. dispositivos por disjuntor C de 10A | 26 |
| Máx. produtos por disjuntor C de 16A | 41 |
| Max. products per 20A C Breaker | 51 |

Lifetime data

| | |
|--------------------------|-------|
| Vida média (horas) | 15000 |
| Average life (Rated) (h) | 15000 |

Physical data

| | |
|-------------------------------------|-------|
| Comprimento nominal do produto (mm) | 104 |
| Nominal Product Diameter (mm) | 60 |
| Peso (kg) | 0.028 |

Packaging

| | |
|---|----------------|
| Código EAN | 5410288273129 |
| Comprimento / altura da embalagem individual (cm) | 12.0 |
| Largura da embalagem individual (cm) | 6.5 |
| Profundidade da embalagem individual (cm) | 6.5 |
| DUN14 (inner) | 15410288273126 |
| Units per inner package | 6 |
| Packaging inner length / height (cm) | 20.8 |
| Packaging inner width (cm) | 16.8 |
| Packaging inner depth (cm) | 13.4 |
| DUN14 (outer) | 25410288273123 |
| Unidades por embalagem exterior | 60 |
| Comprimento / altura da embalagem exterior (cm) | 72.8 |
| Largura da embalagem exterior (cm) | 22.0 |
| Profundidade da embalagem exterior (cm) | 29.1 |

Safety data

| | |
|-------------------------------------|--|
| Breakage cleaning instructions | Not applicable |
| Special purpose lamp | No |
| Dry applications use only | Yes |
| Suitable for household illumination | Yes |
| Safety message | Not Suitable for totally enclosed fixtures |