


OptiClip 600 3000K C8 WH CC WHITE

Item No: 0044008

SYLVANIA


PROTM

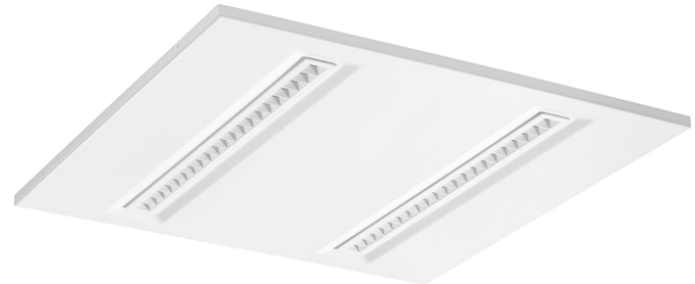

OPTICLIP 600 3000K C8 WH CC WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, Constant Current driver, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Technical Assets

Dimensions (mm)

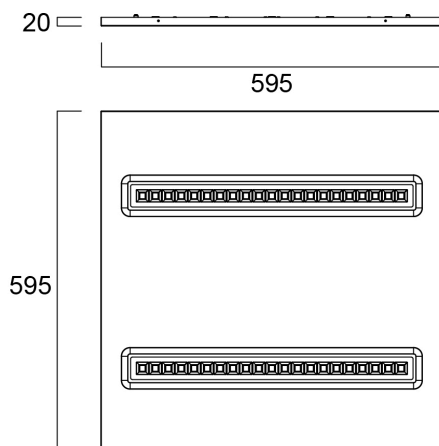

Photometrics

Distance (m)	Cone diameter (m)	Beam diameter (m)	Beam angle (°)	Beam angle (°)	Illuminance (lx)
0.5	0.84 0.82	0.77 0.75	40.1° 39.8°	40.1° 39.8°	7270 1930
1.0	1.68 1.65	1.54 1.50	40.1° 39.8°	40.1° 39.8°	1820 455
1.5	2.52 2.47	2.31 2.25	40.1° 39.8°	40.1° 39.8°	809 186
2.0	3.37 3.30	3.08 2.99	40.1° 39.8°	40.1° 39.8°	455 102
2.5	4.21 4.12	3.85 3.73	40.1° 39.8°	40.1° 39.8°	291 67
3.0	5.05 4.95	4.61 4.47	40.1° 39.8°	40.1° 39.8°	202 47

Distance (m) Cone diameter (m) Illuminance (lx)

— C0 - C180 (Half beam angle: 78.9°) — C90 - C270 (Half beam angle: 80.2°)

