
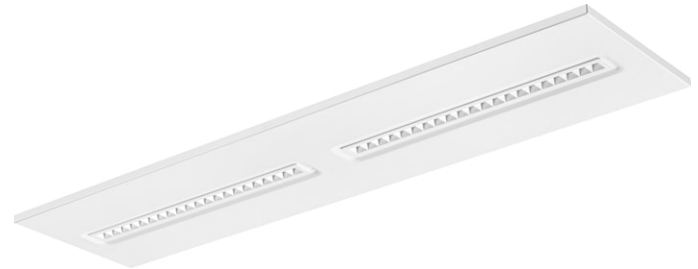


OptiClip 1200 3000K C8 WH DALI WHITE

Item No: 0044013

SYLVANIA


PROTM

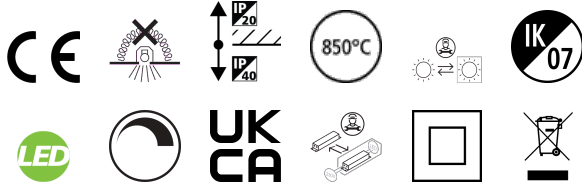

OPTICLIP 1200 3000K C8 WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Technical Assets

Dimensions (mm)

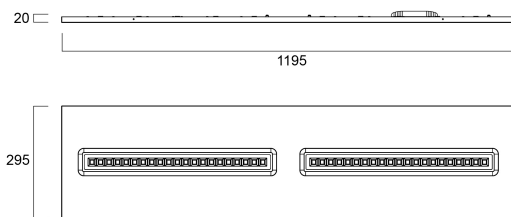

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	0.85 0.92	0.71 0.76	40.2° 39.8°	40.2° 39.8°	7202 1521 1575
1.0	1.68 1.65	1.42 1.39	40.2° 39.8°	40.2° 39.8°	1816 408 419
1.5	2.54 2.47	2.13 2.08	40.2° 39.8°	40.2° 39.8°	807 180 186
2.0	3.36 3.30	2.84 2.79	40.2° 39.8°	40.2° 39.8°	454 103 105
2.5	4.23 4.12	3.55 3.47	40.2° 39.8°	40.2° 39.8°	290 65 67
3.0	5.07 4.95	4.26 4.17	40.2° 39.8°	40.2° 39.8°	202 45 47

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 78.9°)
 — C90 - C270 (Half beam angle: 80.4°)

