


START



0.5	1.52	80°	180
		80°	180
1.0	3.04	80°	45
		80°	45
1.5	4.57	80°	24
		80°	24
2.0	6.09	80°	13
		80°	13
2.5	7.61	80°	8
		80°	8
3.0	9.13	80°	5
		80°	5

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (half beam angle: 113.4°)

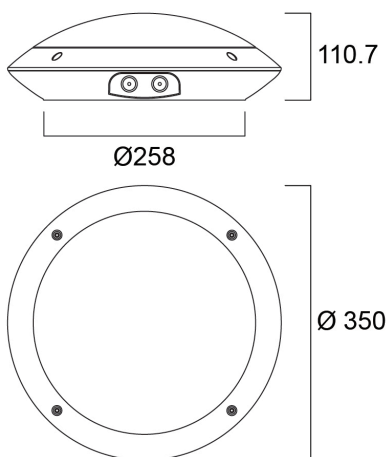