


## PRO<sup>TM</sup>

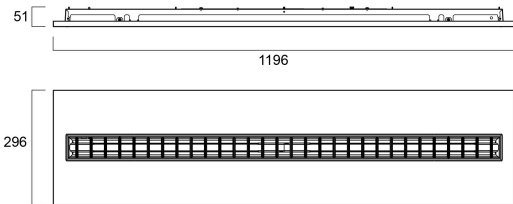

0.5	0.91	80%	9570
	0.69	E(C90) 42°	1881
1.0	1.63	80%	2390
	1.35	E(C90) 42°	483
1.5	2.74	80%	1090
	2.07	E(C90) 42°	218
2.0	3.65	80%	590
	2.76	E(C90) 42°	121
2.5	4.57	80%	300
	3.45	E(C90) 42°	77
3.0	5.48	80%	200
	4.14	E(C90) 42°	54
		E(C90) 34°	14

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 69.2°)  
 — C90 - C270 (Half beam angle: 84.9°)

