


Pixo Medium 3650lm 930 NB MB WB SSA01D Black

Item No: 0062398

SYLVANIA


PROTM

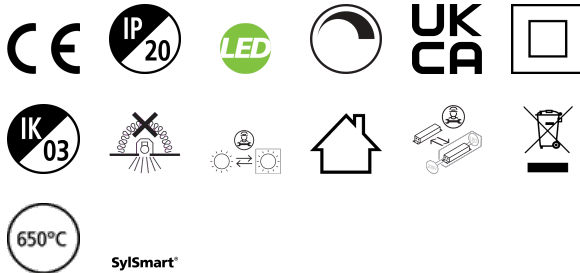


Combine Pixo with our wireless SylSmart controls for flexible, precise adjustment of each luminaire. Helping you highlight products, create focal points and enhance the overall customer experience. Easily update lighting as displays change using our intuitive mobile apps, ensuring your lighting keeps pace with your business. Increase energy efficiency by adding occupancy and daylight sensors for smart, automated savings. Simple and slick integral design with no driver box and without any visible screws. Improved thermal resistance with in-track driver, ideal for retail applications. Extremely precise light beams due to the high-quality lenses. Die-cast aluminum body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour. Light color temperature: 3000K, warm white System power: 32W, Fixture lumen output: 3650lm, efficacy: 114lm/W, Ra90 typical, LED chromaticity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation. Operating voltage 220-240V / 50-60Hz, SylSmart Connected enabled, dimmable wireless control via SylSmart Connected app, ultra low LED flickering rate, suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.81mmx150mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal. Not compatible with surface mount monopoint accessory

Technical Assets

Dimensions (mm)

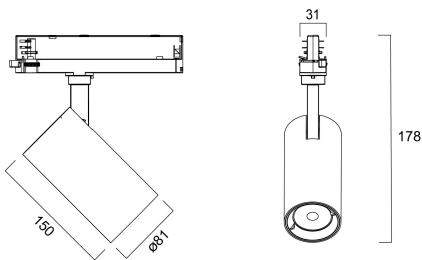

Photometrics

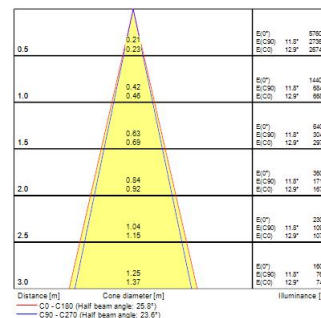

Pixo Medium 3650lm 930 NB MB WB SSA01D Black

Item No: 0062398

SYLVANIA

Physical data

| | |
|-------------------------------------|------------|
| Cor do corpo | Black |
| Proteção IP | IP20 |
| Proteção IK | IK03 |
| Acabamento do difusor | Other |
| Material do difusor | None |
| Reflector finish | High-gloss |
| Comprimento nominal do produto (mm) | 150 |
| Nominal Product Diameter (mm) | 81 |
| Peso (kg) | 0.858 |

Packaging

| | |
|---|----------------|
| Código EAN | 5410288623986 |
| Comprimento / altura da embalagem individual (cm) | 20.0 |
| Largura da embalagem individual (cm) | 25.0 |
| Profundidade da embalagem individual (cm) | 20.0 |
| DUN14 (inner) | 05410288623986 |
| Unidades por embalagem exterior | 1 |
| Comprimento / altura da embalagem exterior (cm) | 20.0 |
| Largura da embalagem exterior (cm) | 25.0 |
| Profundidade da embalagem exterior (cm) | 20.0 |

Safety data

| | |
|--------------------------------------|-------|
| Teste do fio incandescente (°C) | 650 |
| Condição ótima de funcionamento (°C) | 25-25 |