


# QR-CB51 50W GU/GX5.3


Item No: 3021500



## Technical Assets

### Dimensions (mm)


70 Comfort  
minimum recess dimensions:  
400x400x110mm

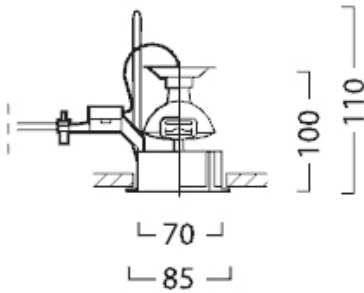

### Photometrics

Distance [m]	Core diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.30	0.58	266
1.0	0.60	1.16	133
1.5	0.91	1.74	89
2.0	1.21	2.32	67
2.5	1.51	2.90	54
3.0	1.81	3.48	45

Distance [m] Core diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 33.6°)

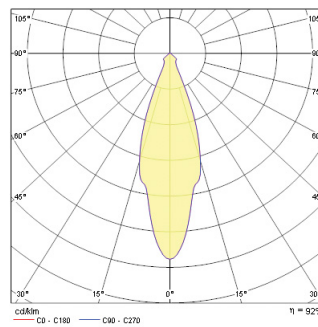

# QR-CB51 50W GU/GX5.3

Item No: 3021500

## General data

Nome do produto	QR-CB51 50W GU/GX5.3
Montagem	Ceiling recessed mounting
Environment	Interior
Aplicação geral	Hospitality, Retail
E-number FI	4270306
E-number SE	7468515

## Optical data

Adjustable chromaticity	N
Tipo de distribuição	Symmetric, Direct

## Electrical data

Classe de proteção elétrica	Class III
Control gear mounting	Remote

## Physical data

Cor do corpo	White
Proteção IP	IP23
Proteção IK	IK02
Max. Lamp Diameter (mm) - D	85
Peso (kg)	0.13
Recessed Depth (mm)	110

## Packaging

Código EAN	8711971215004
Largura da embalagem individual (cm)	11.0
Profundidade da embalagem individual (cm)	9.0
DUN14 (inner)	08711971215004
Comprimento / altura da embalagem exterior (cm)	11.0

## Safety data

Teste do fio incandescente (°C)	850
---------------------------------	-----