


QR-CB51 50W GU/GX5.3

Item No: 3035840



Technical Assets


Dimensions (mm)

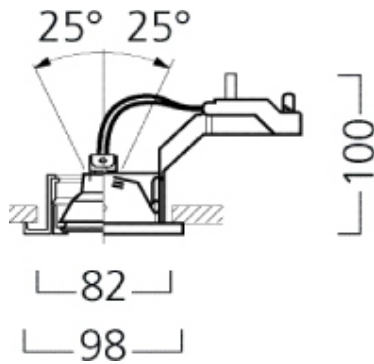

Photometrics

Distance [m]	Core diameter [m]	Illuminance [lx]
0.5	0.07	9600 8300
1.0	0.14	4704 2070
1.5	0.22	1921 850
2.0	0.29	1041 510
2.5	0.36	696 320
3.0	0.43	453 210

Distance [m] Core diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 8.2°)

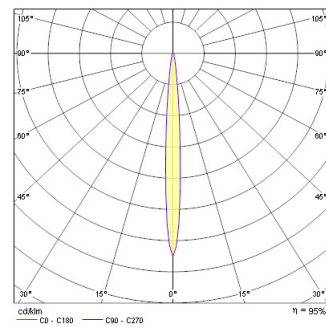

QR-CB51 50W GU/GX5.3

Item No: 3035840

General data

Nome do produto	QR-CB51 50W GU/GX5.3
Montagem	Ceiling recessed mounting
Environment	Interior
Aplicação geral	Hospitality, Office
E-number FI	4277576
E-number SE	7472746

Optical data

Adjustable chromaticity	N
Tipo de distribuição	Adjustable

Electrical data

Classe de proteção elétrica	Class III
Control gear mounting	Remote

Physical data

Cor do corpo	Aluminium
Proteção IP	IP20
Peso (kg)	0.6

Packaging

Código EAN	8711971358404
Largura da embalagem individual (cm)	12.0
Profundidade da embalagem individual (cm)	11.0
Comprimento / altura da embalagem exterior (cm)	23.0

Safety data

Teste do fio incandescente (°C)	850
---------------------------------	-----