

Resisto 1200 IP66 MW 2800lm 840

Item No: 0010220

SYLVANIA


PROTM



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 20W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; MW On/Off.

Technical Assets

Dimensions (mm)

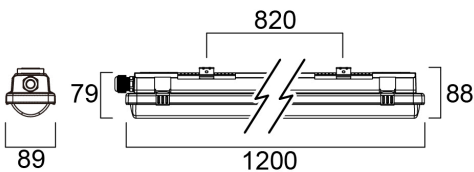


Photometrics

Distance [m]	Cone diameter [m]	E107	E108	E109	E110	E111	E112	E113	E114	E115	E116	E117	E118	E119	E120	Beam angle [°]	Illuminance [lx]
0.5	1.30 1.38	2031	416	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	274
1.0	2.61 2.76	800	160	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	68
1.5	3.91 4.13	408	80	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	28.8
2.0	5.21 5.51	230	46	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	11.5
2.5	6.52 6.88	147	29	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	7.4
3.0	7.82 8.26	102	20	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	52°	4.9

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 108.0°)
— C90 - C270 (Half beam angle: 108.0°)



Resisto 1200 IP66 MW 2800lm 840

Item No: 0010220

SYLVANIA

General data

Product name	Resisto 1200 IP66 MW 2800lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
Built in presence detector	MICROWAVE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
E-number FI	4357049
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 22
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	20
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	6.1
Inrush Duration (µs)	18
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	60
Max. products per 13A C Breaker	79
Max. products per 16A C Breaker	97
Max. products per 20A C Breaker	121
Max. products per 10A B Breaker	60
Max. products per 13A B Breaker	79
Max. products per 16A B Breaker	97
Max. products per 20A B Breaker	121
Connectable conductor cross section - Max (mm ²)	2.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Resisto 1200 IP66 MW 2800lm 840

Item No: 0010220

SYLVANIA

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	1.41

Packaging

Product EAN number	5410288102207
Packaging single length / height (cm)	125.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	9.0
DUN14 (inner)	05410288102207
Units per outer package	1
Packaging outer length / height (cm)	125.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	9.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40