

Resisto 1500 IP66 7600lm 840

Item No: 0010244

SYLVANIA


PROTM



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 55W; 138lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.

Technical Assets


Dimensions (mm)

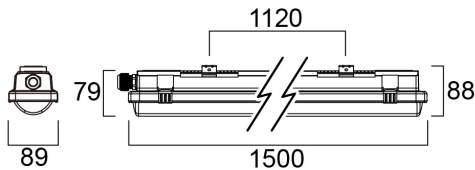

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.39 1.25	51° 52°	1037 1016	1254
1.0	2.77 2.51	51° 52°	2034 204	308
1.5	4.16 3.76	51° 52°	1138 113	137
2.0	5.55 5.01	51° 52°	634 63	98
2.5	6.93 6.26	51° 52°	456 44	69
3.0	8.32 7.52	51° 52°	352 34	51

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 102.3°)
 — C90 - C270 (Half beam angle: 108.4°)



Resisto 1500 IP66 7600lm 840

Item No: 0010244

SYLVANIA

General data

Product name	Resisto 1500 IP66 7600lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
E-number FI	4357057
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7600
Luminaire efficacy (lm/W)	138
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	55
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	16
Inrush Duration (µs)	40
Energy Efficiency Class (A->G) of contained light source	D, D(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	39
Max. products per 20A C Breaker	49
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	32
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49
Connectable conductor cross section - Max (mm ²)	2.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Resisto 1500 IP66 7600lm 840

Item No: 0010244

SYLVANIA

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	1.721

Packaging

Product EAN number	5410288102443
Packaging single length / height (cm)	155.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	9.0
DUN14 (inner)	15410288102440
Units per outer package	1
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	9.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40