


QUADRO 1200x300 830 SSA01D

Item No: 0044722

SYLVANIA


PROTM

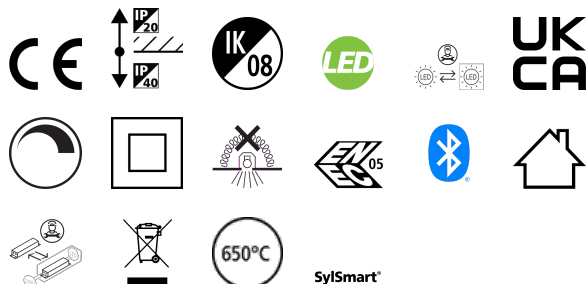

QUADRO 1200X300 830 SSA01D Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K (Warm White), total system power: 35W, total fixture output: 4500lm, efficacy at max output to 129 lm/W, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, Sylsmart Connected enabled, electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,60kg.

Technical Assets


Dimensions (mm)

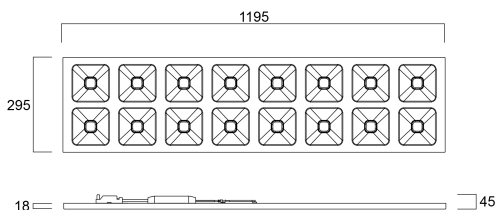

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.74 0.73	0.74 0.73	0.74 0.73	1204 1204
1.0	1.45 1.46	1.45 1.46	1.45 1.46	301 301
1.5	2.23 2.23	2.23 2.23	2.23 2.23	133 133
2.0	2.97 2.93	2.97 2.93	2.97 2.93	80 80
2.5	3.71 3.66	3.71 3.66	3.71 3.66	51 51
3.0	4.46 4.39	4.46 4.39	4.46 4.39	35 35

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 72.4°)
C90 - C270 (Half beam angle: 73.2°)



QUADRO 1200x300 830 SSA01D

Item No: 0044722

SYLVANIA

General data

Product name	QUADRO 1200x300 830 SSA01D
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	-10°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	129
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	900
Max. drive current (mA)	900
Drive current - Range (mA)	/ 900mA
Inrush Current (A)	20
Inrush Duration (µs)	25
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	60
Max. products per 16A B Breaker	55
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

QUADRO 1200x300 830 SSA01D

Item No: 0044722



Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Other
Diffuser material	None
Reflector finish	Matt
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	18
Weight (kg)	3.717

Packaging

Product EAN number	5410288447223
Packaging single length / height (cm)	120.0
Packaging single width (cm)	3.1
Packaging single depth (cm)	36.0
DUN14 (inner)	15410288447220
Units per outer package	4
Packaging outer length / height (cm)	121.5
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	38.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-45