


Start Flood IP65 PIR 3000LM 840 Black

Item No: 0050169

SYLVANIA


START

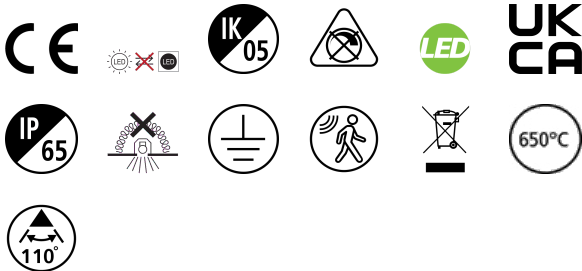

The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 27 W, 111 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 190 x 125 x 52 mm (L x W x H). Weight: 0.393 kg. IK05 rated PIR sensor included, which is tiltable for better adjustment of detection areas.


Technical Assets

Dimensions (mm)

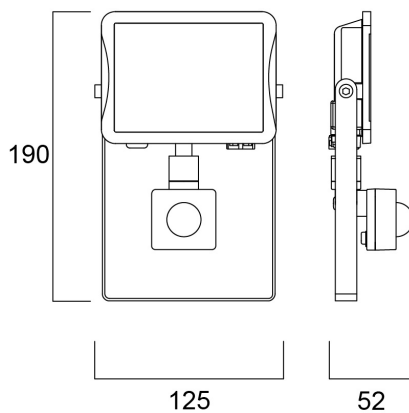

Photometrics

Distance [m]	Cone diameter [m]	Cone diameter [ft]	Cone diameter [in]	Illuminance
0.5	1.28 1.29	4.20 4.23	52.1" 52.2"	4000 3980
1.0	2.57 2.58	8.43 8.47	104.1" 104.2"	1000 995
1.5	3.85 3.87	12.64 12.69	156.1" 156.2"	444 440
2.0	5.14 5.16	16.88 16.92	208.1" 208.2"	250 248
2.5	6.42 6.45	21.06 21.14	260.1" 260.2"	160 158
3.0	7.71 7.74	25.30 25.39	312.1" 312.2"	100 99



Start Flood IP65 PIR 3000LM 840 Black

Item No: 0050169

SYLVANIA

General data

Product name	Start Flood IP65 PIR 3000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Built in presence detector	PIR
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4579637
Warranty	3 years

Optical data

Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	27
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear type	Not required
No. Of switching cycles before premature failures	>15000
Dimmable	No
Dimming method	N/A
Drive current (mA)	111
Inrush Current (A)	1
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	46
Max. products per 13A C Breaker	60
Max. products per 16A C Breaker	76
Max. products per 20A C Breaker	93
Max. products per 10A B Breaker	28
Max. products per 13A B Breaker	36
Max. products per 16A B Breaker	45
Max. products per 20A B Breaker	56
Connectable conductor cross section - Min (mm²)	1
Connectable conductor cross section - Max (mm²)	1

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	70000
Lifespan L80 B20	54000

Start Flood IP65 PIR 3000LM 840 Black

Item No: 0050169



Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK05
Diffuser finish	Transparent
Diffuser material	Glass
Reflector finish	Not Applicable
Nominal Product Length (mm)	190
Nominal Product Width (mm)	125
Nominal Product Height (mm)	52
Weight (kg)	0.393

Packaging

Product EAN number	5410288501697
Packaging single length / height (cm)	13.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	20.0
DUN14 (inner)	15410288501694
Units per outer package	6
Packaging outer length / height (cm)	39.0
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	22.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40