


START ECO FLEX IP67 RGB

Item No: 0068126

SYLVANIA


PROTM

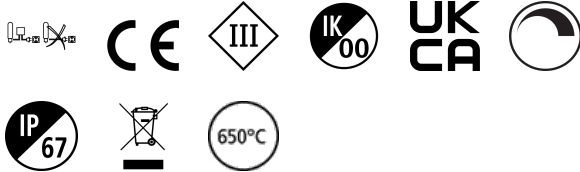

5 metre IP67 LED reel with pre-attached 3M adhesive type; 24V; RGB

Technical Assets


Dimensions (mm)

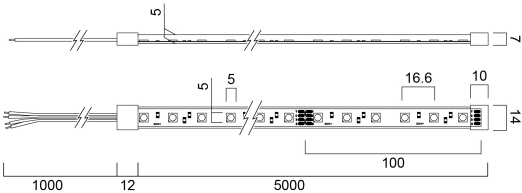

Photometrics

0.5	1.68 2.32	50° 55° 60°	210 21 10
1.0	3.37 4.64	50° 55° 60°	105 10.5 5
1.5	5.05 6.97	50° 55° 60°	70 7 3.5
2.0	6.74 9.28	50° 55° 60°	52.5 5.25 2.6
2.5	8.42 11.61	50° 55° 60°	42 4.2 2.1
3.0	10.11 13.93	50° 55° 60°	35 3.5 1.75

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (half beam angle: 152.4°)
— C90 - C270 (half beam angle: 118.9°)



START ECO FLEX IP67 RGB

Item No: 0068126

SYLVANIA

General data

Product name	START ECO FLEX IP67 RGB
Technology	LED
Accessory type	Mounting
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
Warranty	3 years

Optical data

Useful luminous flux (Φ_{use})	1500
Fixture luminous flux (Φ_m)	1500
CRI (Ra)	30
Beam Angle (°)	120
Photobiological Risk Group	RG1

Electrical data

Power consumption (W)	60
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	2500

Lifetime data

Lifespan L70 B50	30000
Lifespan L70 B10	30000
Lifespan L80 B10	30000
Lifespan L90 B10	30000

Physical data

Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	12
Nominal Product Height (mm)	4.8
Weight (kg)	0.5

Packaging

Product EAN number	5410288681269
Packaging single length / height (cm)	29.5
Packaging single width (cm)	27.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681266
Units per outer package	10
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	34.0
Packaging outer depth (cm)	30.0

Safety data

Glow Wire Test (°C)	650
---------------------	-----