

Instar Trend 75 SW IP44 BA No-LMP

Item No: 0079061

SYLVANIA


PROTM



INSTAR TREND SW IP44 INDOOR BA is the recessed housing frame to use with GX5.3 LED lamp, not included in the packaging.. Aluminium body, round bezel ring in brushed aluminium finish, IP44 degree of protection, class II, Suitable for internal environment only.

Technical Assets


Dimensions (mm)

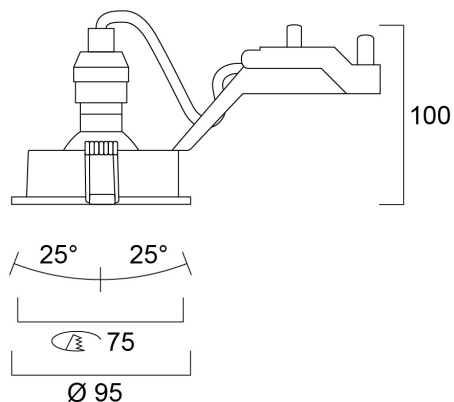

Photometrics

0.5	0.30	EPD EBCD	16.8°	2096 1309
1.0	0.60	EPD EBCD	16.8°	1739 1059
1.5	0.91	EPD EBCD	16.8°	1228 745
2.0	1.21	EPD EBCD	16.8°	885 527
2.5	1.51	EPD EBCD	16.8°	678 405
3.0	1.81	EPD EBCD	16.8°	527 316

Distance [m] Cone diameter [m]
CD - C180 (half beam angle: 33.8°)



Instar Trend 75 SW IP44 BA No-LMP

Item No: 0079061

SYLVANIA

General data

Product name	Instar Trend 75 SW IP44 BA No-LMP
Technology	Light Source Not Integrated
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Indoor
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

Electrical data

Light source included	Fixture without Lightsource
Emergency type	
Total power consumption (W)	0.1
Supply current (A)	0.001
Primary Supply/Product voltage - min (V)	12.0
Primary Supply/Product voltage - max (V)	12.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	1
Electrical protection	Class III
Control gear required	Yes
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60/HF
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	30
Connectable conductor cross section - Max (mm²)	1.5

Physical data

Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	85
Nominal Product Diameter (mm)	83
Built-in diameter (mm)	75
Max. Lamp Diameter (mm) - D	95
Weight (kg)	0.174
Recessed Depth (mm)	90

Instar Trend 75 SW IP44 BA No-LMP

Item No: 0079061



Packaging

Product EAN number	5410288790619
Packaging single length / height (cm)	13.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	15410288790616
Units per outer package	30
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	28.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-10-40