
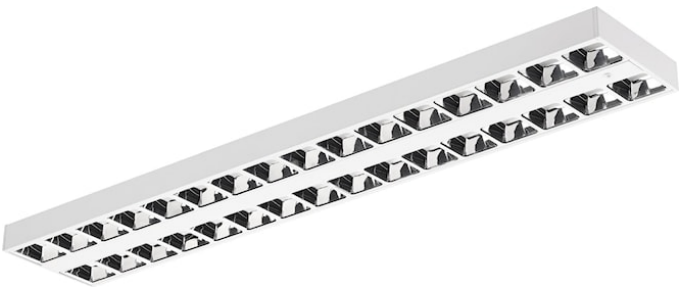


OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI EM

Item No: 2023706


Concord

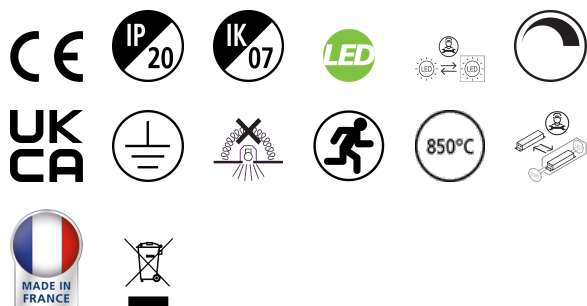

OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI EM is a high efficacy low glare luminaire for office and education applications. Suitable for surface and suspended mounting. Size: 1129x200x45mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI dimmable. 3hr maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3600lm. Power consumption 26W. Luminaire efficacy 138lm/W. Lifespan: 60,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.


Technical Assets

Dimensions (mm)

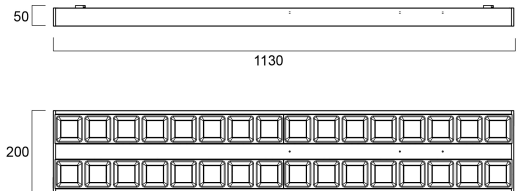

Photometrics

Distance (m)	Cone diameter (m)	Beam angle (°)	Beam diameter (m)	Beam area (m²)	Beam flux (lm)	Beam illuminance (lx)
0.5	0.78	75.0°	0.78	0.38	903	2354
1.0	1.56	75.0°	1.56	1.55	2257	589
1.5	2.34	75.0°	2.34	2.34	1003	248
2.0	3.12	75.0°	3.12	3.12	594	140
2.5	3.91	75.0°	3.91	3.91	391	89
3.0	4.69	75.0°	4.69	4.69	291	62



OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI EM

Item No: 2023706

Concord

General data

Product name	OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI EM
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	138
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	85

Electrical data

Emergency mode	Non-maintained
Emergency type	
Emergency duration (h)	3
Total power consumption (W)	26
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	250
Inrush Current (A)	22.4
Inrush Duration (µs)	176
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OPTIX SURFACE 1200x200 2 LINE 4000K ALU DALI EM

Item No: 2023706

Concord

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	1129
Nominal Product Width (mm)	200
Nominal Product Height (mm)	45
Weight (kg)	4.8

Packaging

Product EAN number	5025768237067
Packaging single length / height (cm)	117.0
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (inner)	05025768237067
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	6.8

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25