


OPTIX LINEAR RECESSED 1200 LUMI 4K ALU

Item No: 2023847


Concord

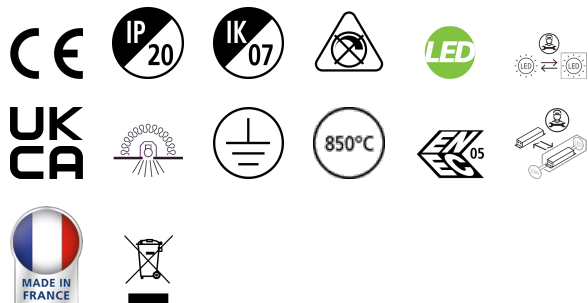

OPTIX LINEAR RECESSED 1200 LUMI 4000K ALU is a ceiling recessed linear luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. Constant current driver. 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 4000K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.778; Fidelity Index R_f: 94; Gamut Index R_g: 98. For 4000K luminous flux: 2850lm. Power consumption: 30W. Luminaire efficacy: 95lm/W. UGR<19 Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 60,000hrs L80B20 lifespan.

Technical Assets


Dimensions (mm)

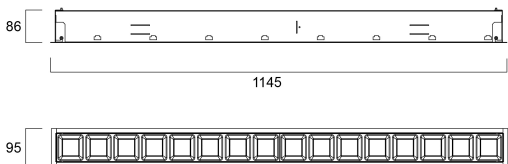

Photometrics

0.5	0.77	50°	1289
1.0	1.55	50°	645
1.5	2.32	50°	390
2.0	3.09	50°	292
2.5	3.86	50°	230
3.0	4.64	50°	192

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (half beam angle: 75.4°)



OPTIX LINEAR RECESSED 1200 LUMI 4K ALU

Item No: 2023847

Concord

General data

Product name	OPTIX LINEAR RECESSED 1200 LUMI 4K ALU
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2870
Luminaire efficacy (lm/W)	96
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	30
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	200
Inrush Current (A)	25
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	27
Max. products per 13A C Breaker	35
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	58
Max. products per 10A B Breaker	16
Max. products per 13A B Breaker	21
Max. products per 16A B Breaker	27
Max. products per 20A B Breaker	35
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	60000

OPTIX LINEAR RECESSED 1200 LUMI 4K ALU

Item No: 2023847

Concord

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	1146
Nominal Product Width (mm)	95
Nominal Product Height (mm)	90
Weight (kg)	3.15

Packaging

Product EAN number	5025768238477
Packaging single length / height (cm)	119.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768238477
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25