


OPTIX LINEAR RECESSED 1200 LUMI 4K ALU DALI

Item No: 2023848


Concord

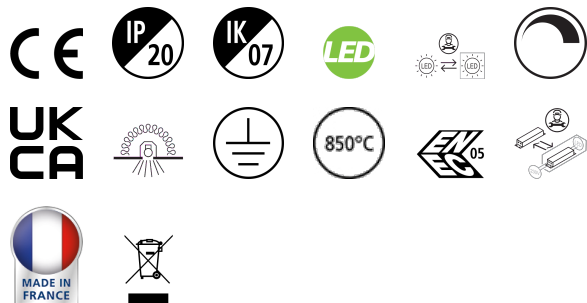

OPTIX LINEAR RECESSED 1200 LUMI 4000K ALU DALI is a ceiling recessed linear luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. DALI dimmable. 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 4000K - Colour rendering index $R_a > 98$; Melanopic Ratio MEER: 0.778; Fidelity Index R_f : 94; Gamut Index R_g : 98. For 4000K luminous flux: 2850lm. Power consumption: 30W. Luminaire efficacy: 95lm/W. UGR<19 Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 60,000hrs L80B20 lifespan.


Technical Assets

Dimensions (mm)

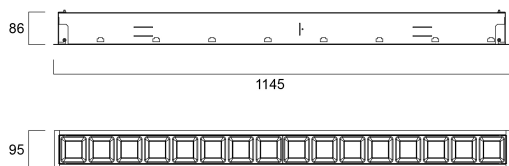

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam area [m²]	Beam flux [lm]	Beam illuminance [lx]
0.5	0.77	75.4°	0.77	0.47	1289	1870
1.0	1.55	75.4°	1.55	1.88	1522	483
1.5	2.32	75.4°	2.32	3.39	810	282
2.0	3.09	75.4°	3.09	4.98	498	143
2.5	3.86	75.4°	3.86	7.42	292	72
3.0	4.64	75.4°	4.64	10.7	202	48



OPTIX LINEAR RECESSED 1200 LUMI 4K ALU DALI

Item No: 2023848

Concord

General data

Product name	OPTIX LINEAR RECESSED 1200 LUMI 4K ALU DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2870
Luminaire efficacy (lm/W)	96
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	30
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	200
Inrush Current (A)	23
Inrush Duration (µs)	174
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

OPTIX LINEAR RECESSED 1200 LUMI 4K ALU DALI

Item No: 2023848

Concord

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	1146
Nominal Product Width (mm)	95
Nominal Product Height (mm)	90
Weight (kg)	3.15

Packaging

Product EAN number	5025768238484
Packaging single length / height (cm)	119.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768238484
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25